




Empfänger

Gesellschaft  
Referenz  
Adresse  
Phone  
Fax  
E-mail

DKLPE 65-1600/BQQE/1,6 NGD 3x400 50/60 IE5

Number of working motors : 2

Curve tolerance according to ISO 9906

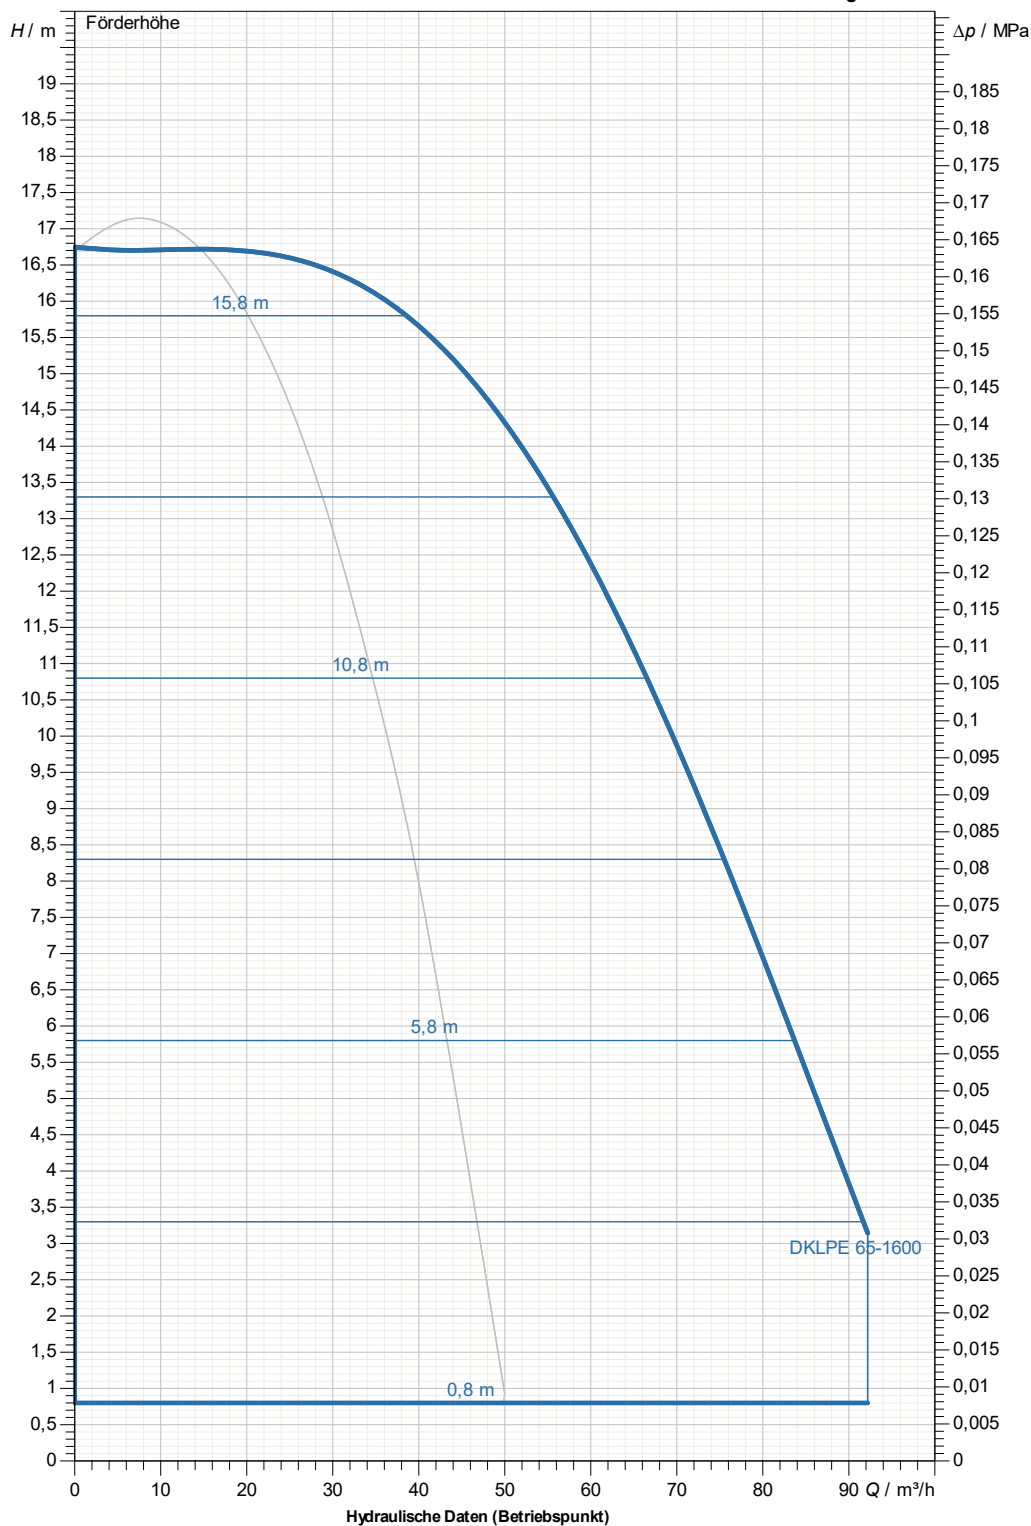

Saugseite  
DN 65  
1,6 MPa

Druckseite  
DN 65  
1,6 MPa

Fördermenge :

Förderhöhe :

Nenngeschwindigkeit:  
2.975 1/min

MAIN\_PROJECT\_TITLE

BUSINESS\_PROCESS\_ID




OWNER\_

ISSUE\_DATE

28/07/26

Gesellschaft  
Referenz  
Adresse  
Phone  
Fax  
E-mail

**DKLPE 65-1600/BQQE/1,6 NGD 3x400 50/60 IE5**

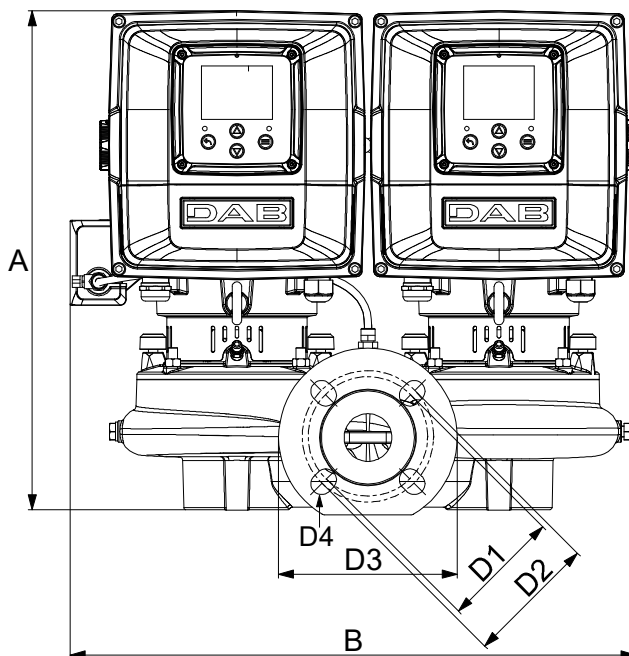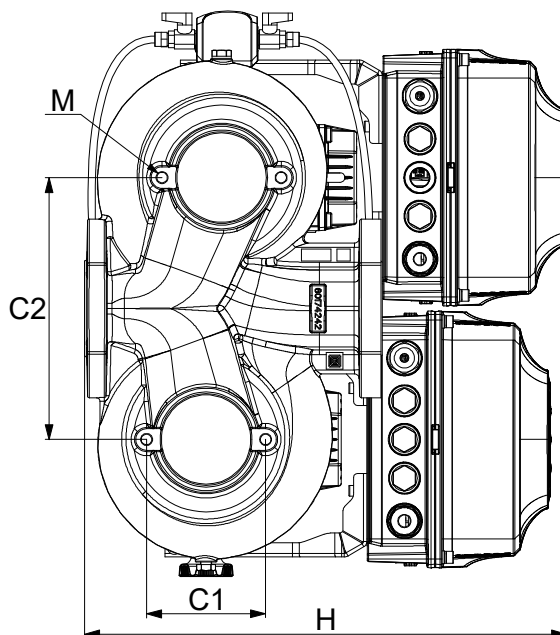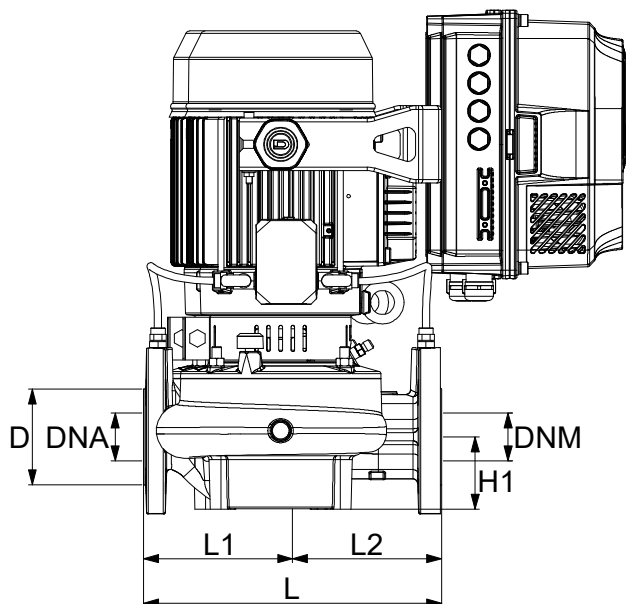

**Abmessungen in mm**

**Pumpenanschlüsse**

|    |     |     |    |     |  |  |  |           |
|----|-----|-----|----|-----|--|--|--|-----------|
| 1  | A   | 528 | H  | 465 |  |  |  |           |
| 2  | B   | 495 | H1 | 82  |  |  |  |           |
| 3  | C1  | 140 | L  | 340 |  |  |  | Saug      |
| 4  | C2  | 240 | L1 | 170 |  |  |  | DN 65     |
| 5  | D   | 110 | L2 | 170 |  |  |  | 1,6 MPa   |
| 6  | D1  | 130 | M  | 10  |  |  |  |           |
| 7  | D2  | 145 |    |     |  |  |  | Discharge |
| 8  | D3  | 185 |    |     |  |  |  | DN 65     |
| 9  | D4  | 18  |    |     |  |  |  | 1,6 MPa   |
| 10 | DNA | 65  |    |     |  |  |  |           |
| 11 | DNM | 65  |    |     |  |  |  |           |

Projekt

Projektnummer

Erstellt durch

Erstellt am

28/07/26