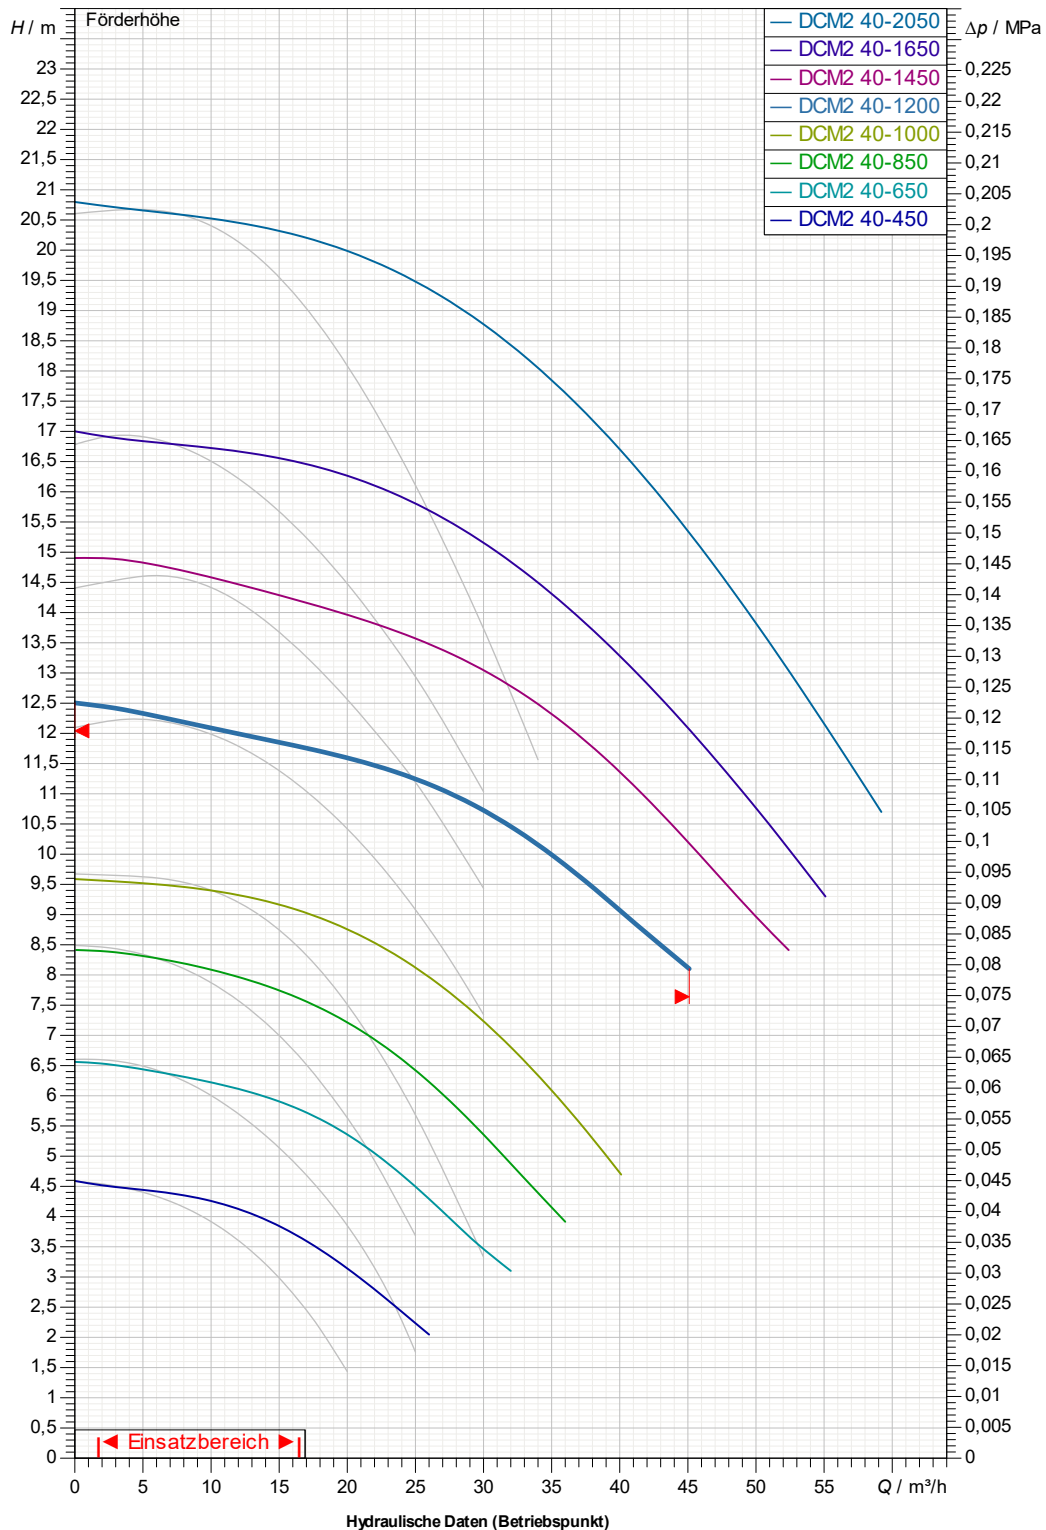


Empfänger

Gesellschaft
Referenz
Adresse
Phone
Fax
E-mail

DCM2 40-1200/A/BQQE/2,2 3x230/400 50 IE3
Curve tolerance according to ISO 9906


Saugseite
DN 40
PN10, PN16

Druckseite
DN 40
PN10, PN16

Fördermenge :

Förderhöhe :

Nenngeschwindigkeit:
1.450 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID


OWNER_

ISSUE_DATE

28/07/26

Gesellschaft
Referenz
Adresse
Phone
Fax
E-mail

DCM2 40-1200/A/BQQE/2,2 3x230/400 50 IE3

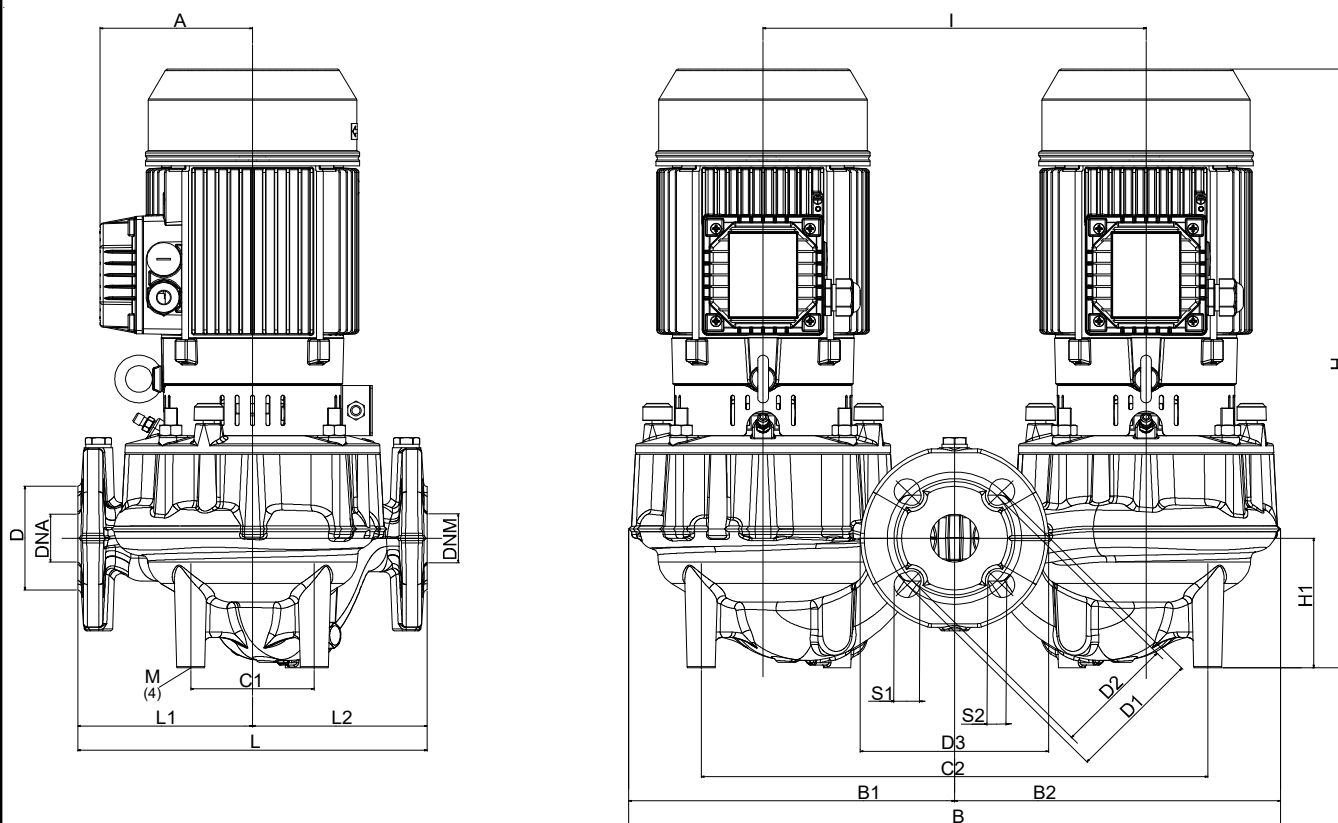

Abmessungen in mm							Pumpenanschlüsse	
1	A	134,5	DNM	40			Saug DN 40 PN10, PN16	
2	B	770	H	560,5				
3	B1	385	H1	100				
4	B2	385	I	400				
5	C1	177	L	440				
6	C2	577	L1	240				
7	D	88	L2	200				
8	D1	110	M	10				
9	D2	100	S1	20				
10	D3	150	S2	20				
11	DNA	40					Discharge DN 40 PN10, PN16	
MAIN_PROJECT_TITLE			BUSINESS_PROCESS_ID			OWNER_		ISSUE_DATE 28/07/26