


Получатель

Company
Reference
Address
Phone
Fax
E-mail

DCM2 50-1000/A/BQQE/1.1 3x230/400 50 IE3

Curve tolerance according to ISO 9906

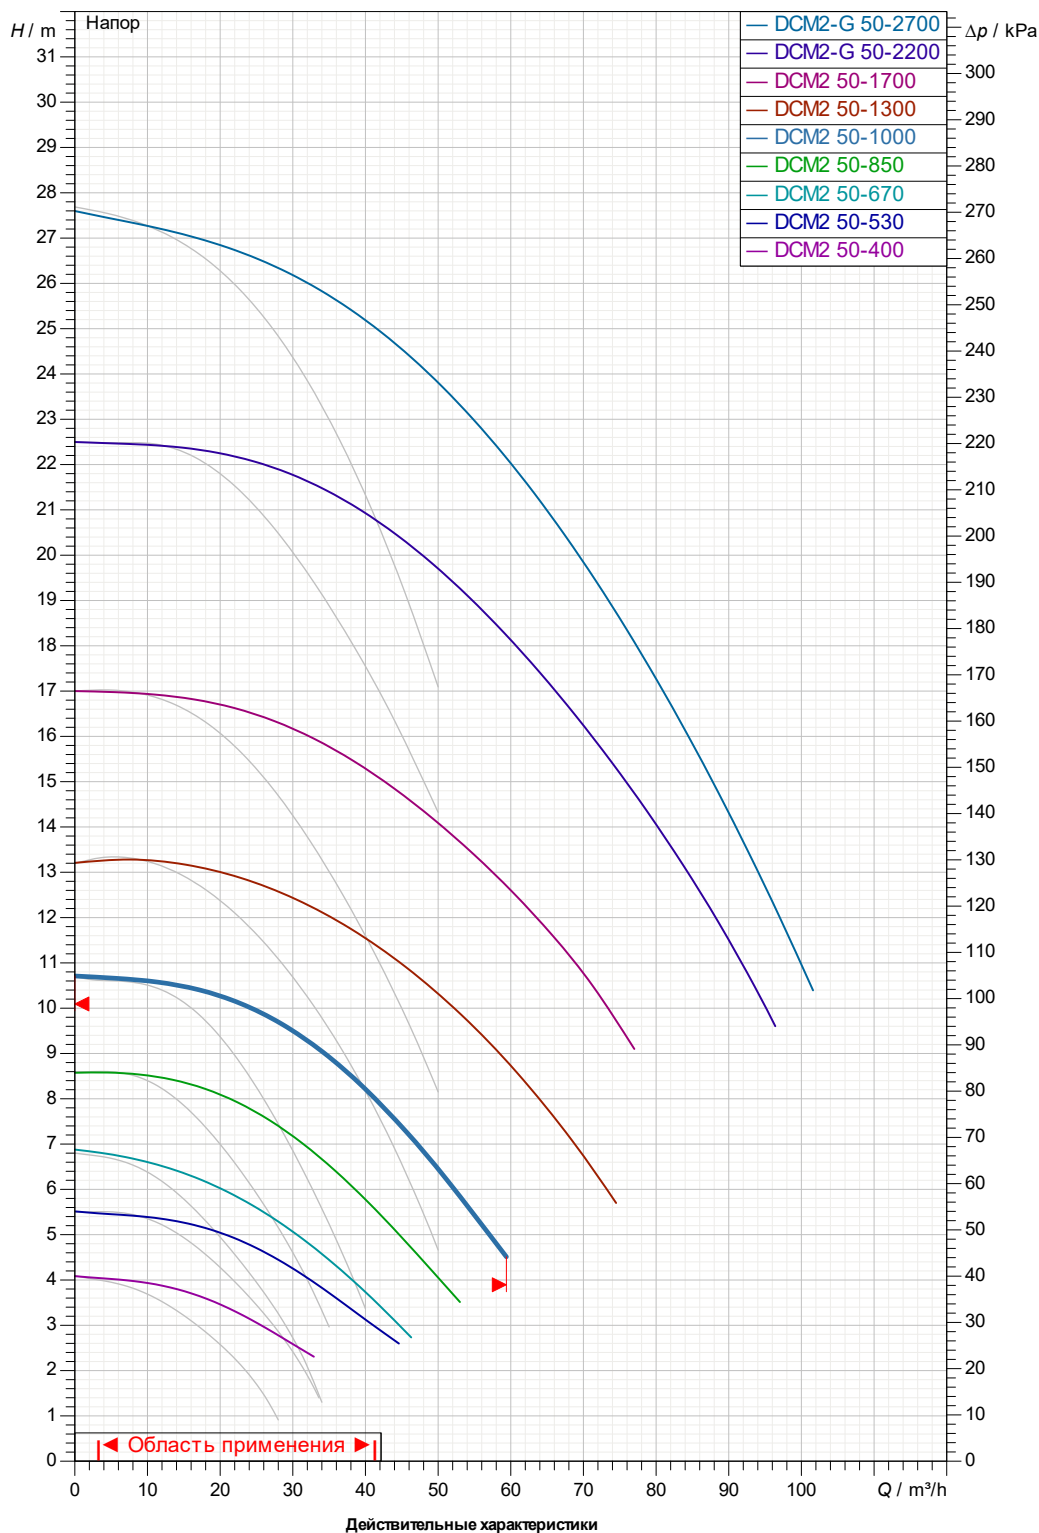

Вход
DN 50
PN10, PN16

Вых
DN 50
PN10, PN16

Расход :

Напор :

Частота вращения
1450 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

Untitled project 2026-07-24 11:38:00.454

OWNER_



ISSUE_DATE

24/07/26

Получатель

Company
Reference
Address
Phone
Fax
E-mail

DCM2 50-1000/ABQQE/1.1 3x230/400 50 IE3

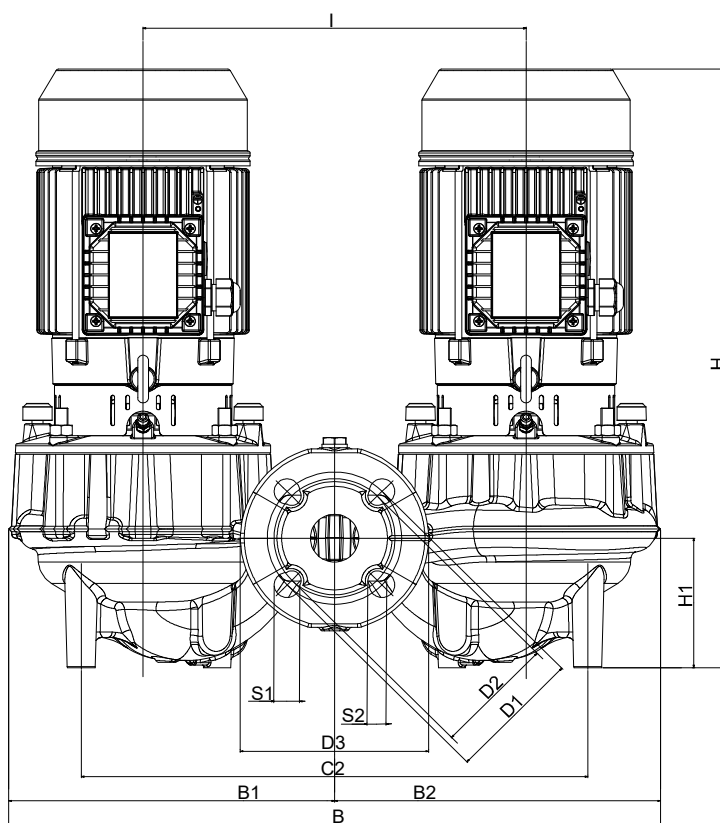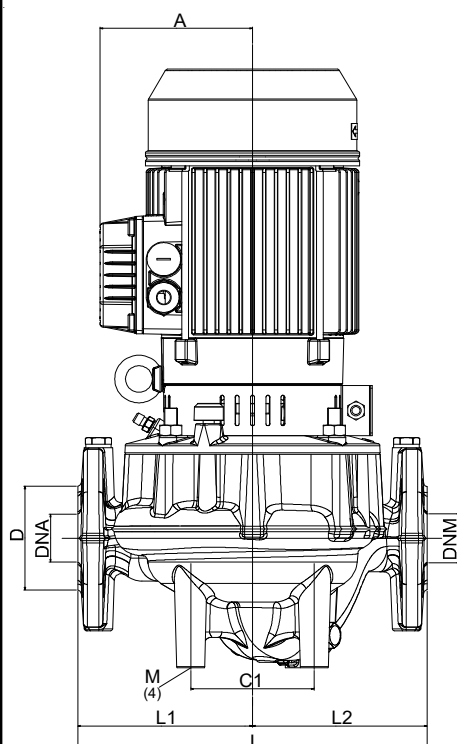

Измерения в mm

Соединения насоса:

1	A	134.5	DNM	50			
2	B	631	H	560			
3	B1	313	H1	105			всасывании :
4	B2	319	I	350			DN 50
5	C1	113	L	340			PN10, PN16
6	C2	463	L1	190			
7	D	100	L2	150			подачу :
8	D1	125	M	10			DN 50
9	D2	110	S1	21.8			PN10, PN16
10	D3	165	S2	14			
11	DNA	50					

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

Untitled project 2026-07-24 11:38:00.454

OWNER_

ISSUE_DATE

24/07/26