

Вых DN 50 / PN10, PN16



mm

230

210

10

21.8

14

100

100

100

--	--

Вход	DN 50	/	PN10, PN16
------	-------	---	------------


Вых DN 50 / PN10, PN16

Получатель

Company
Reference
Address
Phone
Fax
E-mail

DCM2 50-1700/A/BQQE/2.2 3x230/400 50 IE3

Curve tolerance according to ISO 9906

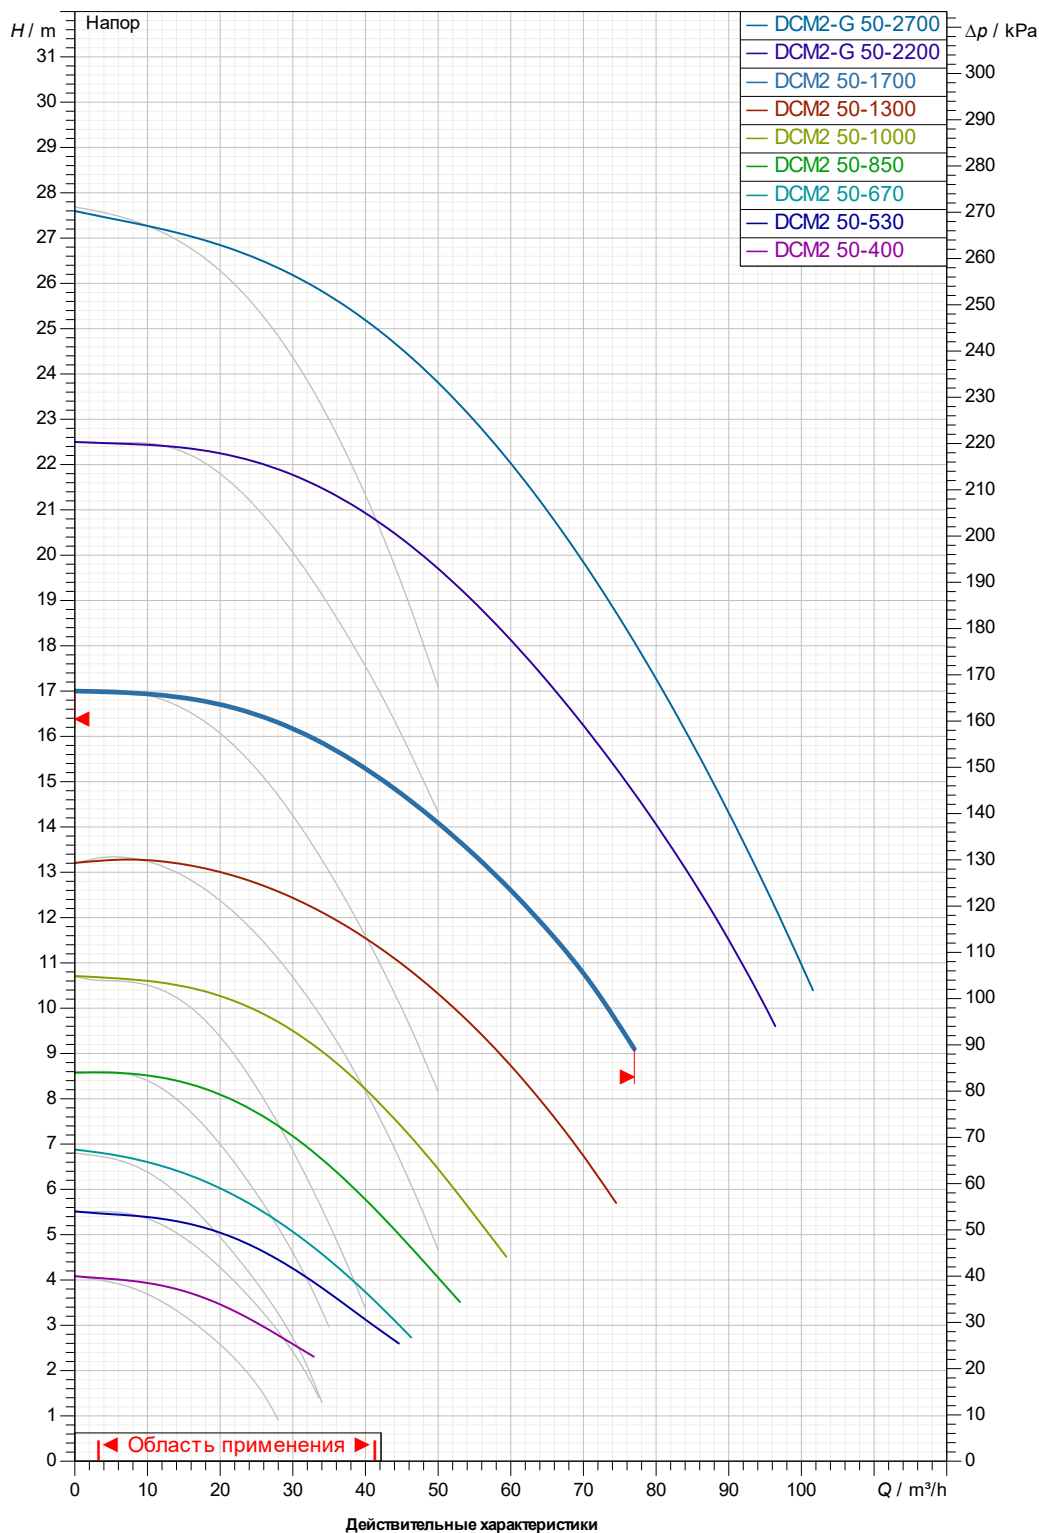

Вход
DN 50
PN10, PN16

Вых
DN 50
PN10, PN16

Расход :

Напор :

Частота вращения
1450 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

Untitled project 2026-07-24 11:38:00.454

OWNER_


ISSUE_DATE

24/07/26

Получатель

Company
Reference
Address
Phone
Fax
E-mail

DCM2 50-1700/ABQQE/2.2 3x230/400 50 IE3

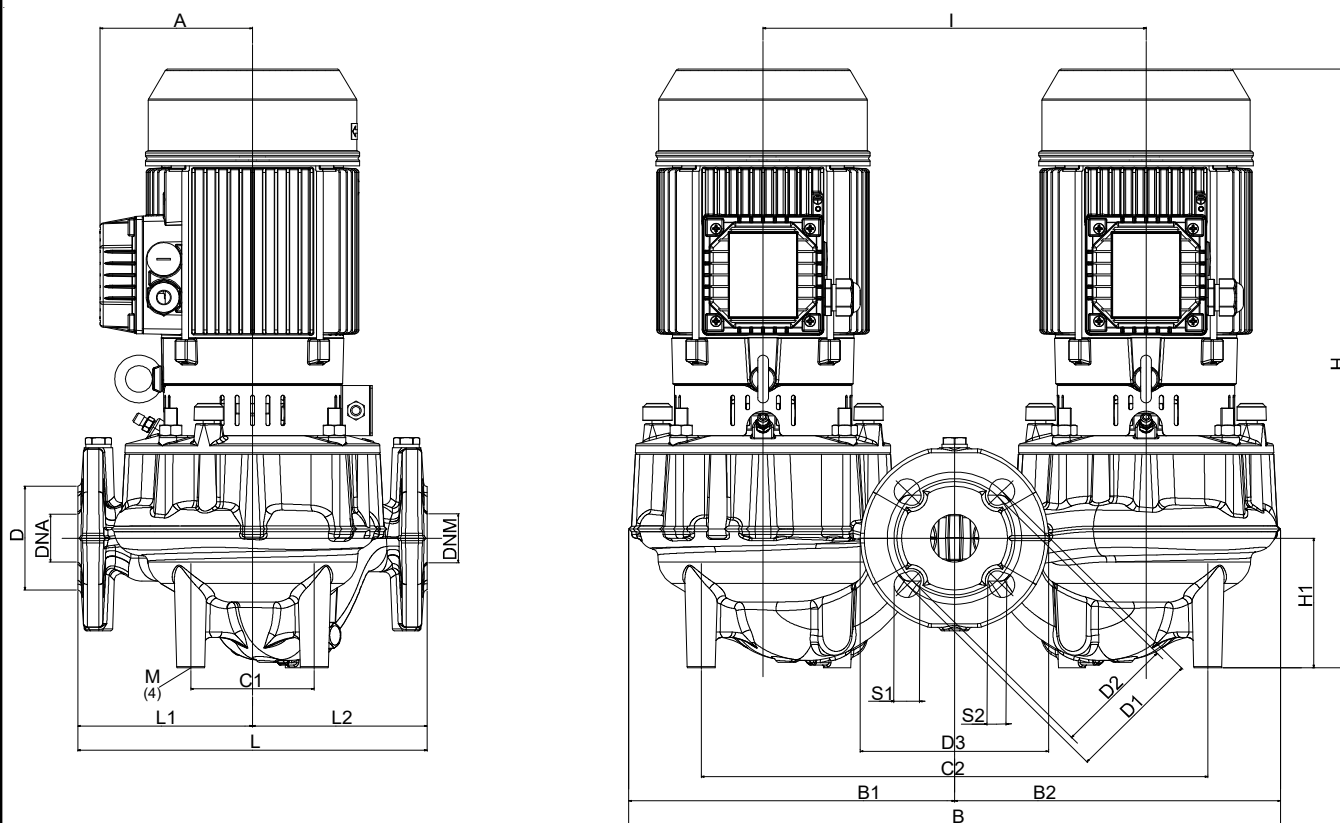

Измерения в mm

Соединения насоса:

1	A	134.5	DNM	50				
2	B	869	H	589				
3	B1	435	H1	128.4				всасывания :
4	B2	435	I	480				DN 50
5	C1	184	L	440				PN10, PN16
6	C2	664	L1	230				
7	D	100	L2	210				подачу :
8	D1	125	M	10				DN 50
9	D2	110	S1	21.8				PN10, PN16
10	D3	165	S2	14				
11	DNA	50						

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

Untitled project 2026-07-24 11:38:00.454

OWNER_

ISSUE_DATE

24/07/26