


Empfänger

Gesellschaft
Referenz
Adresse
Phone
Fax
E-mail

DCP2 50-2800/A/BQQE/4 3x230/400 50 IE3

Curve tolerance according to ISO 9906

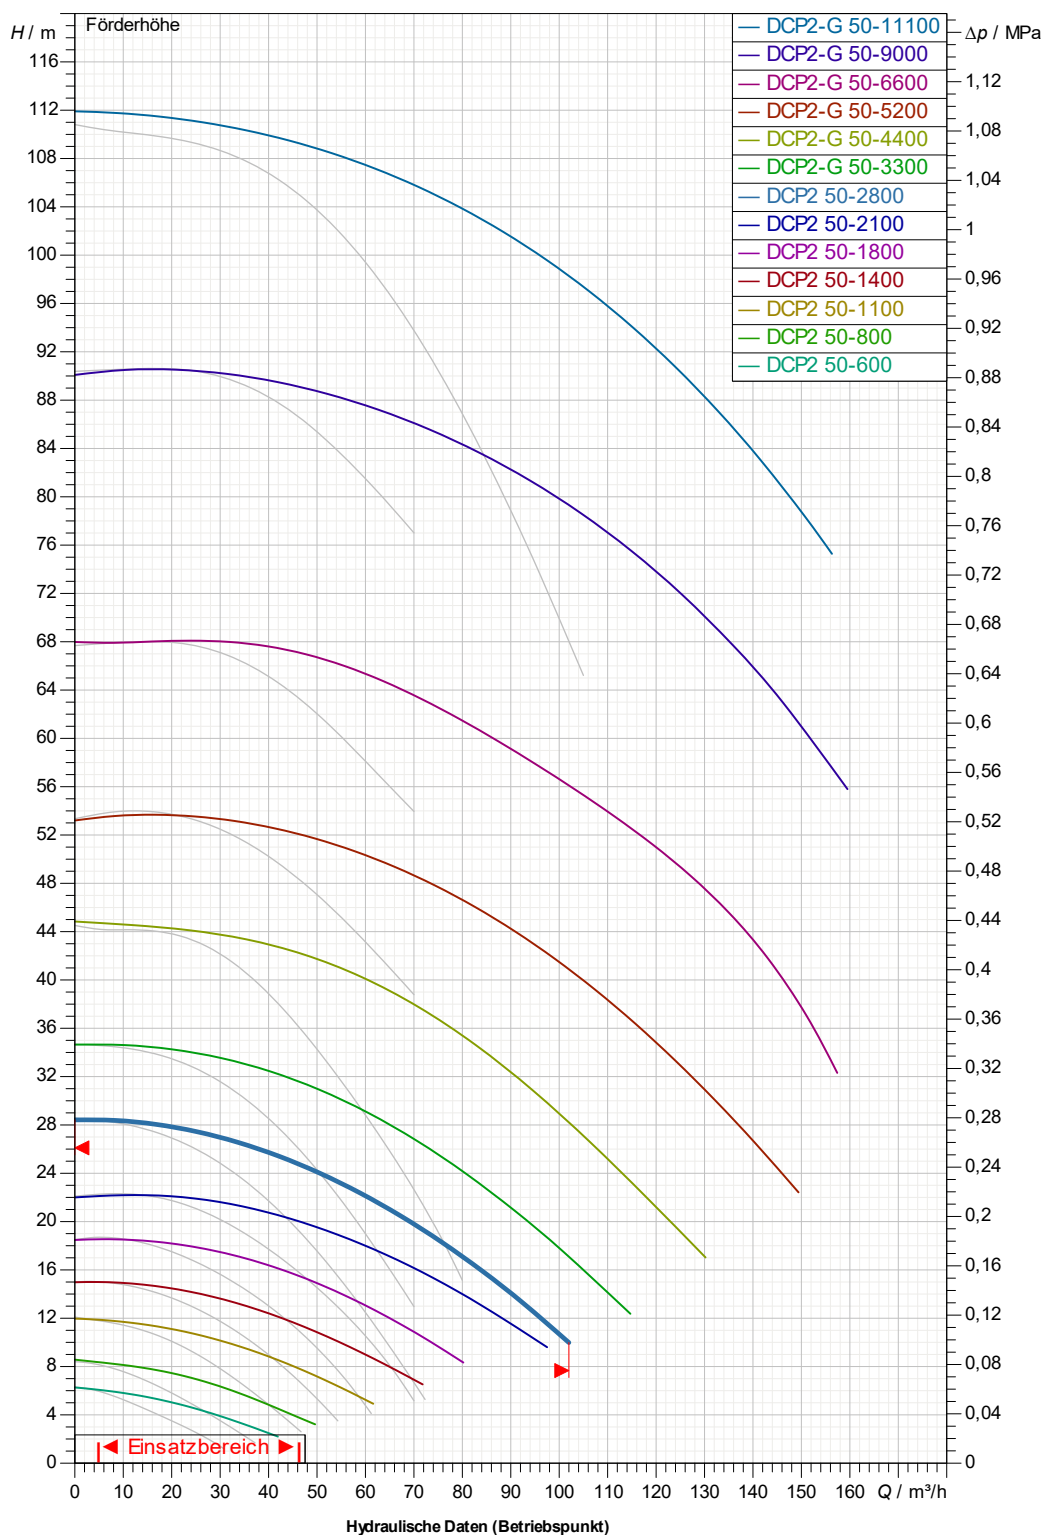

Saugseite
DN 50
PN10, PN16

Druckseite
DN 50
PN10, PN16

Fördermenge :

Förderhöhe :

Nenngeschwindigkeit:
2.910 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_



ISSUE_DATE

28/07/26

Empfänger

Gesellschaft
Referenz
Adresse
Phone
Fax
E-mail

DCP2 50-2800/A/BQQE/4 3x230/400 50 IE3

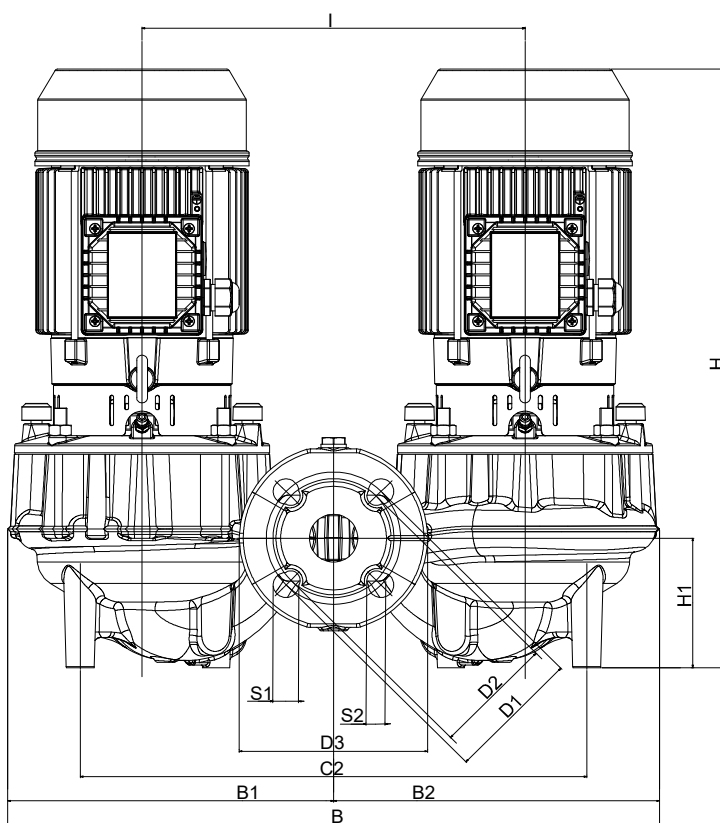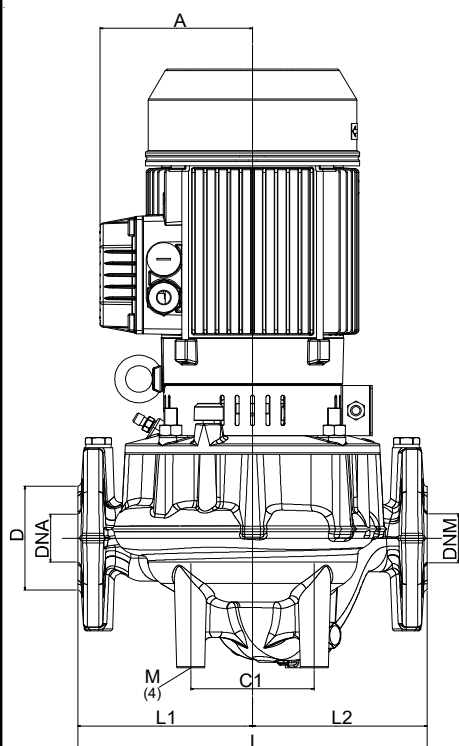

Abmessungen in mm

1	A	134,5	DNM	50					
2	B	134,5	H	560					
3	B1	313	H1	105					
4	B2	319	I	350					
5	C1	113	L	340					
6	C2	463	L1	190					
7	D	100	L2	150					
8	D1	125	M	10					
9	D2	110	S1	21,8					
10	D3	165	S2	14					
11	DNA	50							

Pumpenanschlüsse

Saug
DN 50
PN10, PN16

Discharge
DN 50
PN10, PN16

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

28/07/26