

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

Customer pos. no.:

500124020

Model :

2 K 35/40 M

Pump data

MEI ≥ --

Product version Versione con serbatoi

Pressure rating : PN 10

Min. fluid temperature : -10 °C

Max. fluid temperature : 50 °C

Max. Ambient temperature : 40 °C

Requested data

Flow :

Head :

Fluid : Water

Fluid Temperature : 20 °C

Density : 998,3 kg/m³

Kinematic viscosity : 1,005 mm²/s

Vapor pressure : 0,34 psi

Hydraulic data (duty point)

Flow :

Head :

Motor data main pump:

Brand: DAB

Nominal power P2 : 0,75 kW

Rated speed : 2.800 1/min

Rated voltage : 1~ 230 V 50 Hz



Nominal current : 5,5 A

Degree of protection : IP 44

Dimensions in mm

A	687		
B	557		
DNA	2"		
DNM	1"1/2		
E	347		
H	900		
H1	428		
H2	145		

Curve tolerance according to ISO 9906

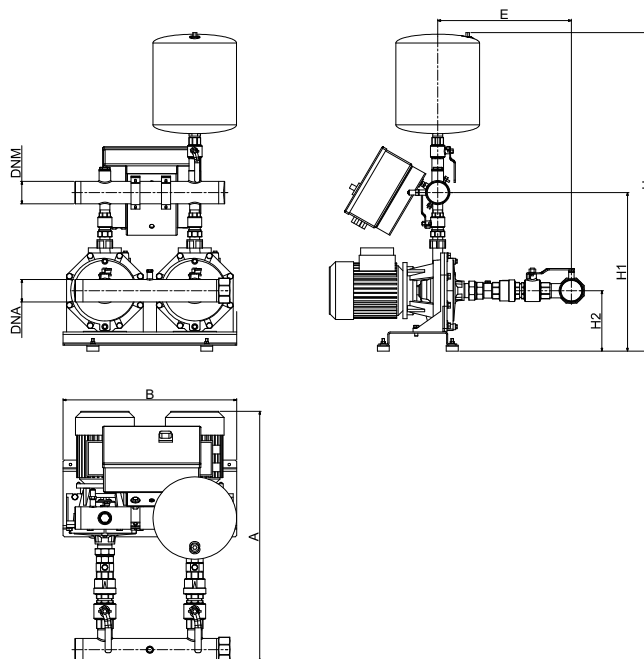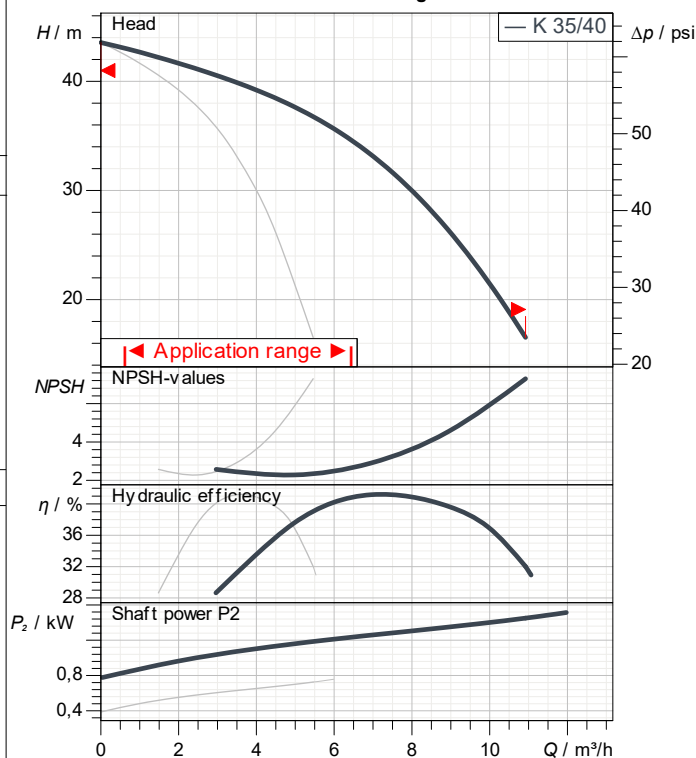

Weight : 69 kg

Pump connection

Suction side : 2" / PN 10

Discharge side : 1" 1/2 / PN 10


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

2 K 35/40 M

Curve tolerance according to ISO 9906

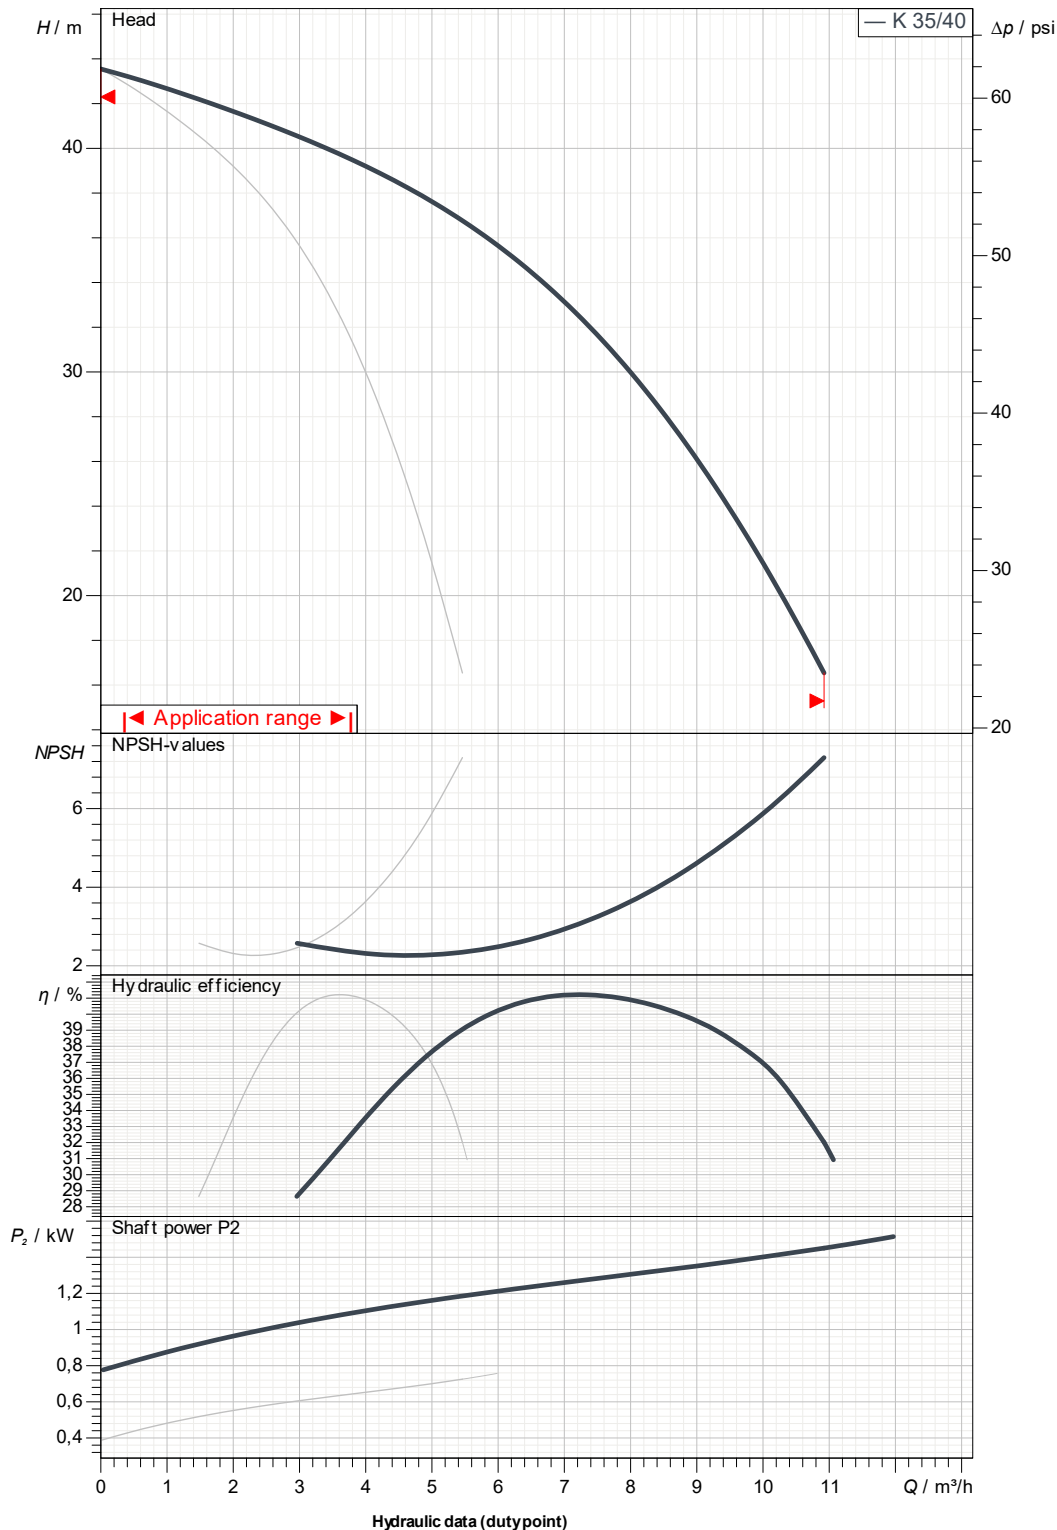

Suction side :
2"
PN 10

Discharge side :
1" 1/2
PN 10

Flow :

Head :

Rated speed :
2.800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

20/09/24



DIMENSIONAL DRAWING

20/09/24

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

2 K 35/40 M

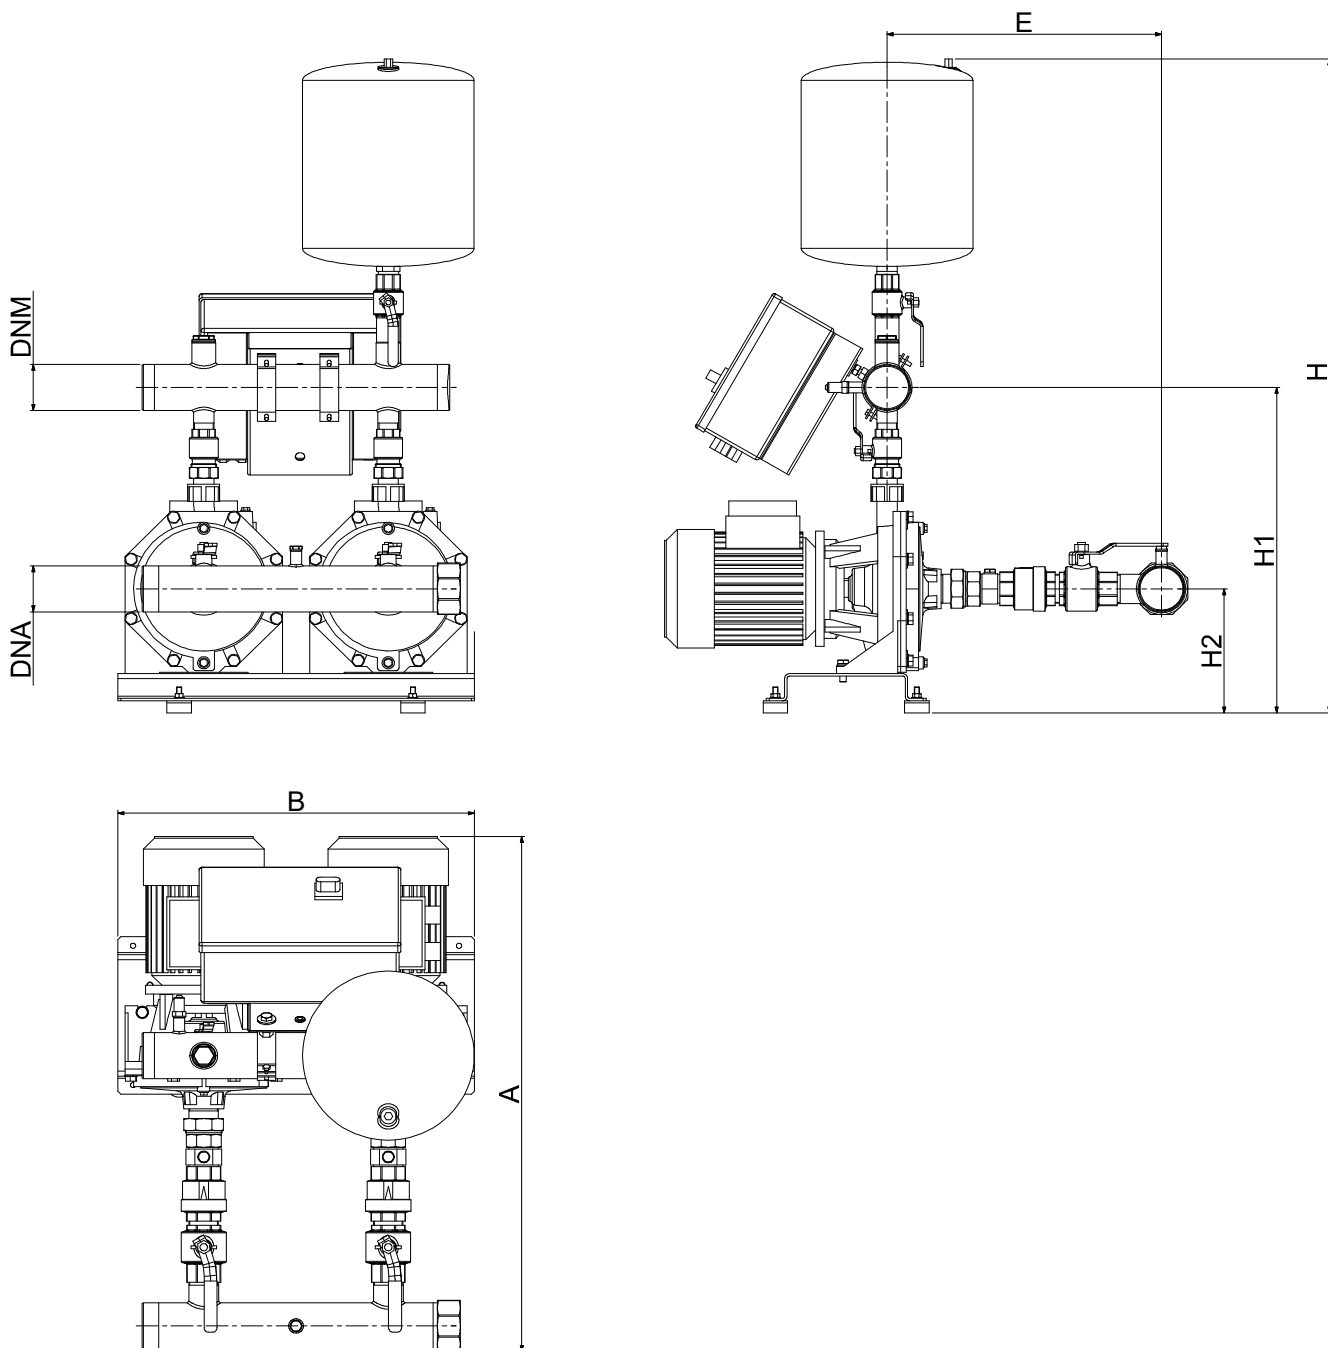

Dimensions in mm

Pump connection

1
2
3
4
5
6
7
8
9
10
11

A
B
DNA
DNM
E
H
H1
H2

687
557
2"
1"1/2
347
900
428
145

Suction
2"
PN 10

Discharge
1" 1/2
PN 10

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

20/09/24