




NMT SAN MAX II 40/40 F250

979528167

NMT SAN MAX II / Electronically regulated circulating pump for sanitary water

GENERAL

Product number	979528167		
Product name	NMT SAN MAX II 40/40 F250		
Seal type		Energy efficiency index	0.2
Net weight	13.50 kg		
Head max. (H max)	4.42 m	H min	0.0 m
Flow max. (Q max)	13.25 m³/h	Q min	0.0 m³/h
	%		
Noise	≤43 dB(A)		

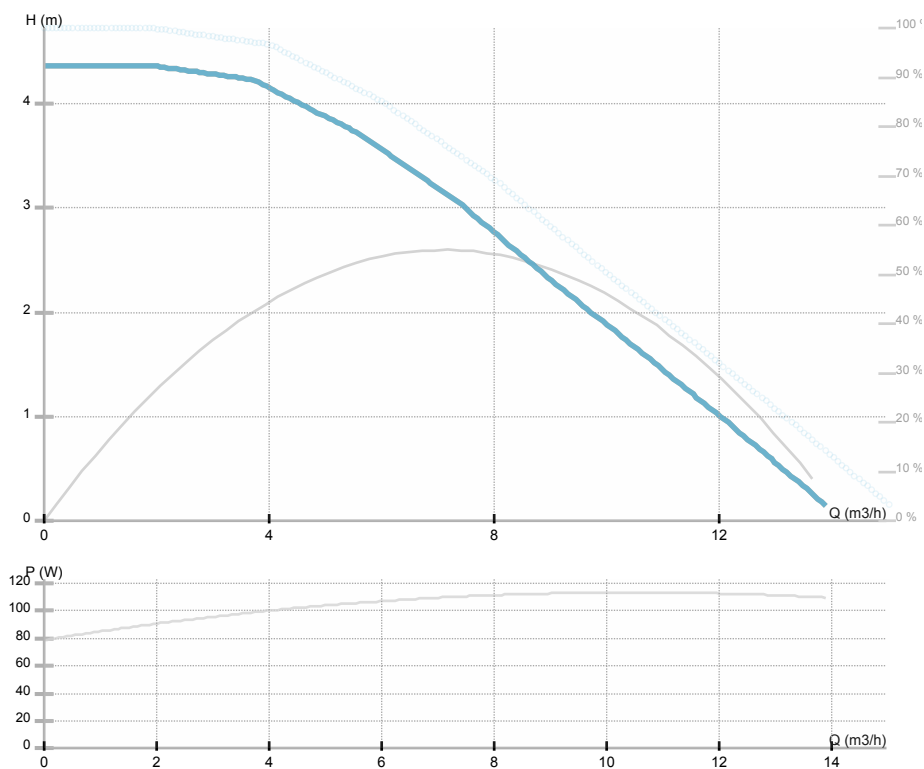

ELECTRICAL DATA

Supply voltage	1~230 V
Mains frequency	50/60 Hz
Power input max.	110 W
Speed max.	2700 rpm
Insulation class	H (180) °C
Current max.	1.0 A
Protection class	IP44
Thermal protection	NTC
Frame size	
Motor IE class	

INSTALLATION

Pumped liquid	water VDI 2035
Liquid temperature	2.0 ÷ 65.0 °C
Ambient temp.range	40 °C
Port-to-port length	250 mm
Pipe connection	40
Pressure rating	PN 6/10
Connection	PN 6/10
Max operating pressure	1.0 MPa

MATERIAL

Bearing	Graphite
Impeller	PES GF 30
Hydraulics	bronze
Shaft	AISI 420

NMT SAN MAX II 40/40 F250

979528167

NMT SAN MAX II / Electronically regulated circulating pump for sanitary water






NMT SAN MAX II 40/40 F250

979528167

NMT SAN MAX II / Electronically regulated circulating pump for sanitary water

Dimension drawing

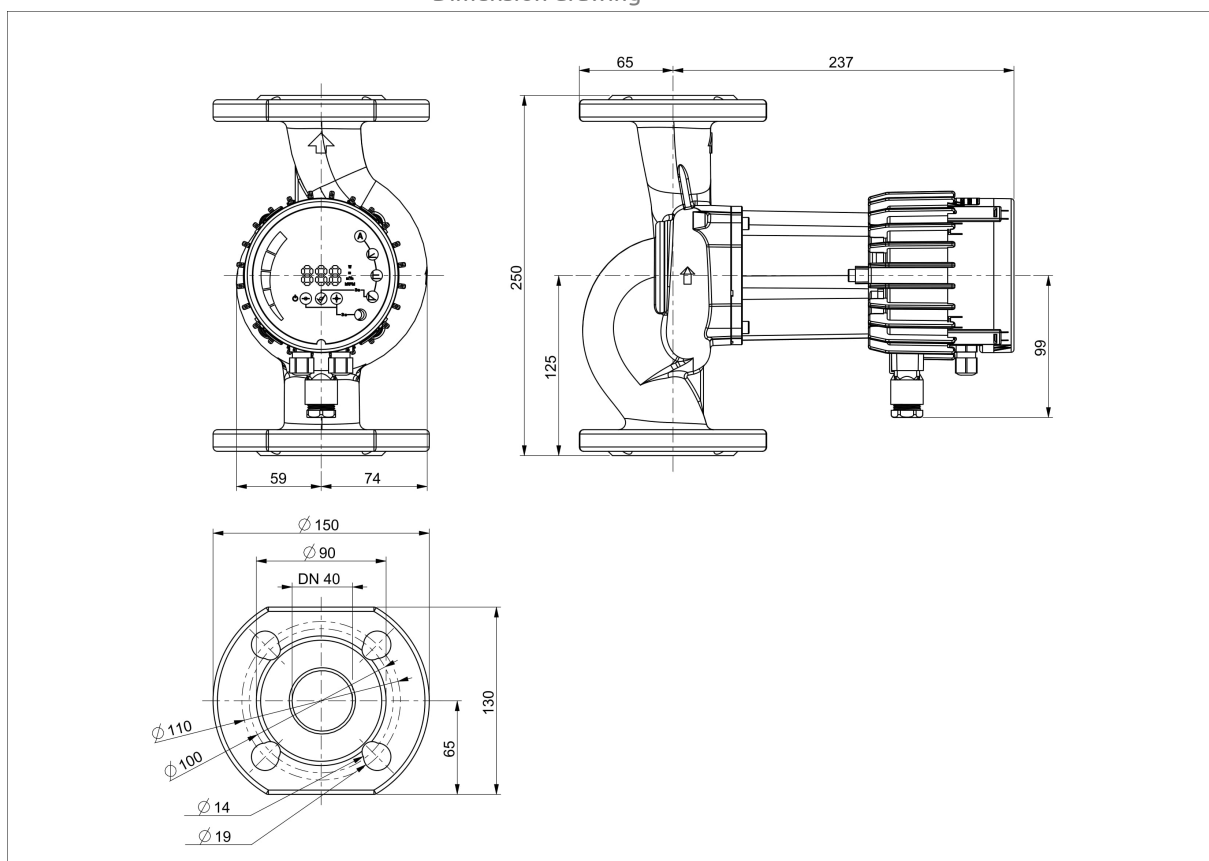




NMT SAN MAX II 40/40 F250

979528167

NMT SAN MAX II / Electronically regulated circulating pump for sanitary water

Electrical wiring

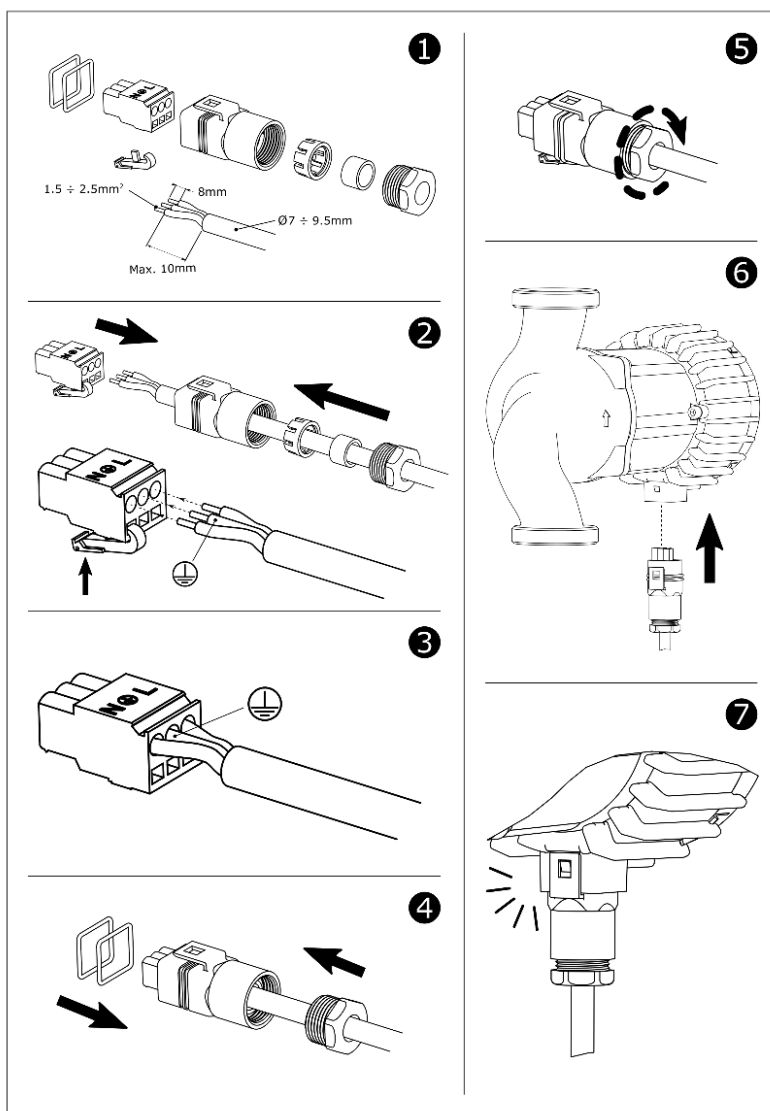



NMT SAN MAX II 40/40 F250

979528167

NMT SAN MAX II / Electronically regulated circulating pump for
sanitary water