


	Product Information LPP65-51-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/12/20
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95Б
Item NO		Contacts	
		Contact	

Part NO.	LPP65-51-7.5/2		
Product Picture		Note	
		This series products are vertical in-line centrifugal pump. Standard configuration Mechanical seal standard motor. In daily maintenance the motor and impeller can be removed from the pump body for the maintenance and repair no need to remove pump body from the pipeline. Optimization design of impeller by CFD fluid simulation and analysis technology less axial force longer bearing life. Appearance designed by Italy professional shape design team the most advanced modular design concept. The surface of the whole machine adopts electrophoretic coating process, have better anti-corrosion effect.	
Nameplate parameters			
flow	25 m³/h		
head	51 m		
speed	2950 rpm		
number of stages	1		
Technical			
Curve tolerance	ISO9906 AnnexA		
Maximum lift (m)	54		
Minimum usage flow (m³/ h)	3		
Maximum use flow (m³/ h)	40		
Material			
Impeller	HT200		
Pump inlet	HT200		
Pump shaft	AISI304		
Mechanical seal	SiC/C		
O-ring	NBR		
Working conditions			
Max. ambient temperature (°C)	40		
Max. liquid temperature (°C)	90		
Pumped medium	Thin, clean, non corrosive, non flammable and explosive liquid without solid particles and fibers.		
Working pressure	16bar		
Installation			
Inlet & Outlet Diameter	DN65		
Connection standard	DIN		
Motor			
Motor phase	Three phase		
Protection class	IP55		
Motor poles	2		
Insulation class	F		
Motor power (KW)	7.5KW		
Frequency	50		
Rated voltage (V)	380		
Rated current (A)	14.3717474265847		
Efficiency class	IE3		
Power factor	0.88		


	Product Information LPP65-51-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/12/20
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95Б
Item NO		Contacts	
		Contact	

Drive end bearing	7308
Non-drive end bearing	6306
Efficiency (%)	90.1
Weight/Packaging	
Gross weight (kg)	93
Package size	795*490*430
	

	Performance Curve LPP65-51-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/12/20
Project Name		Client Name	Spaceport
Item NO		Client Addr.	Куйбышева 95Б
		Contacts	
		Contact	

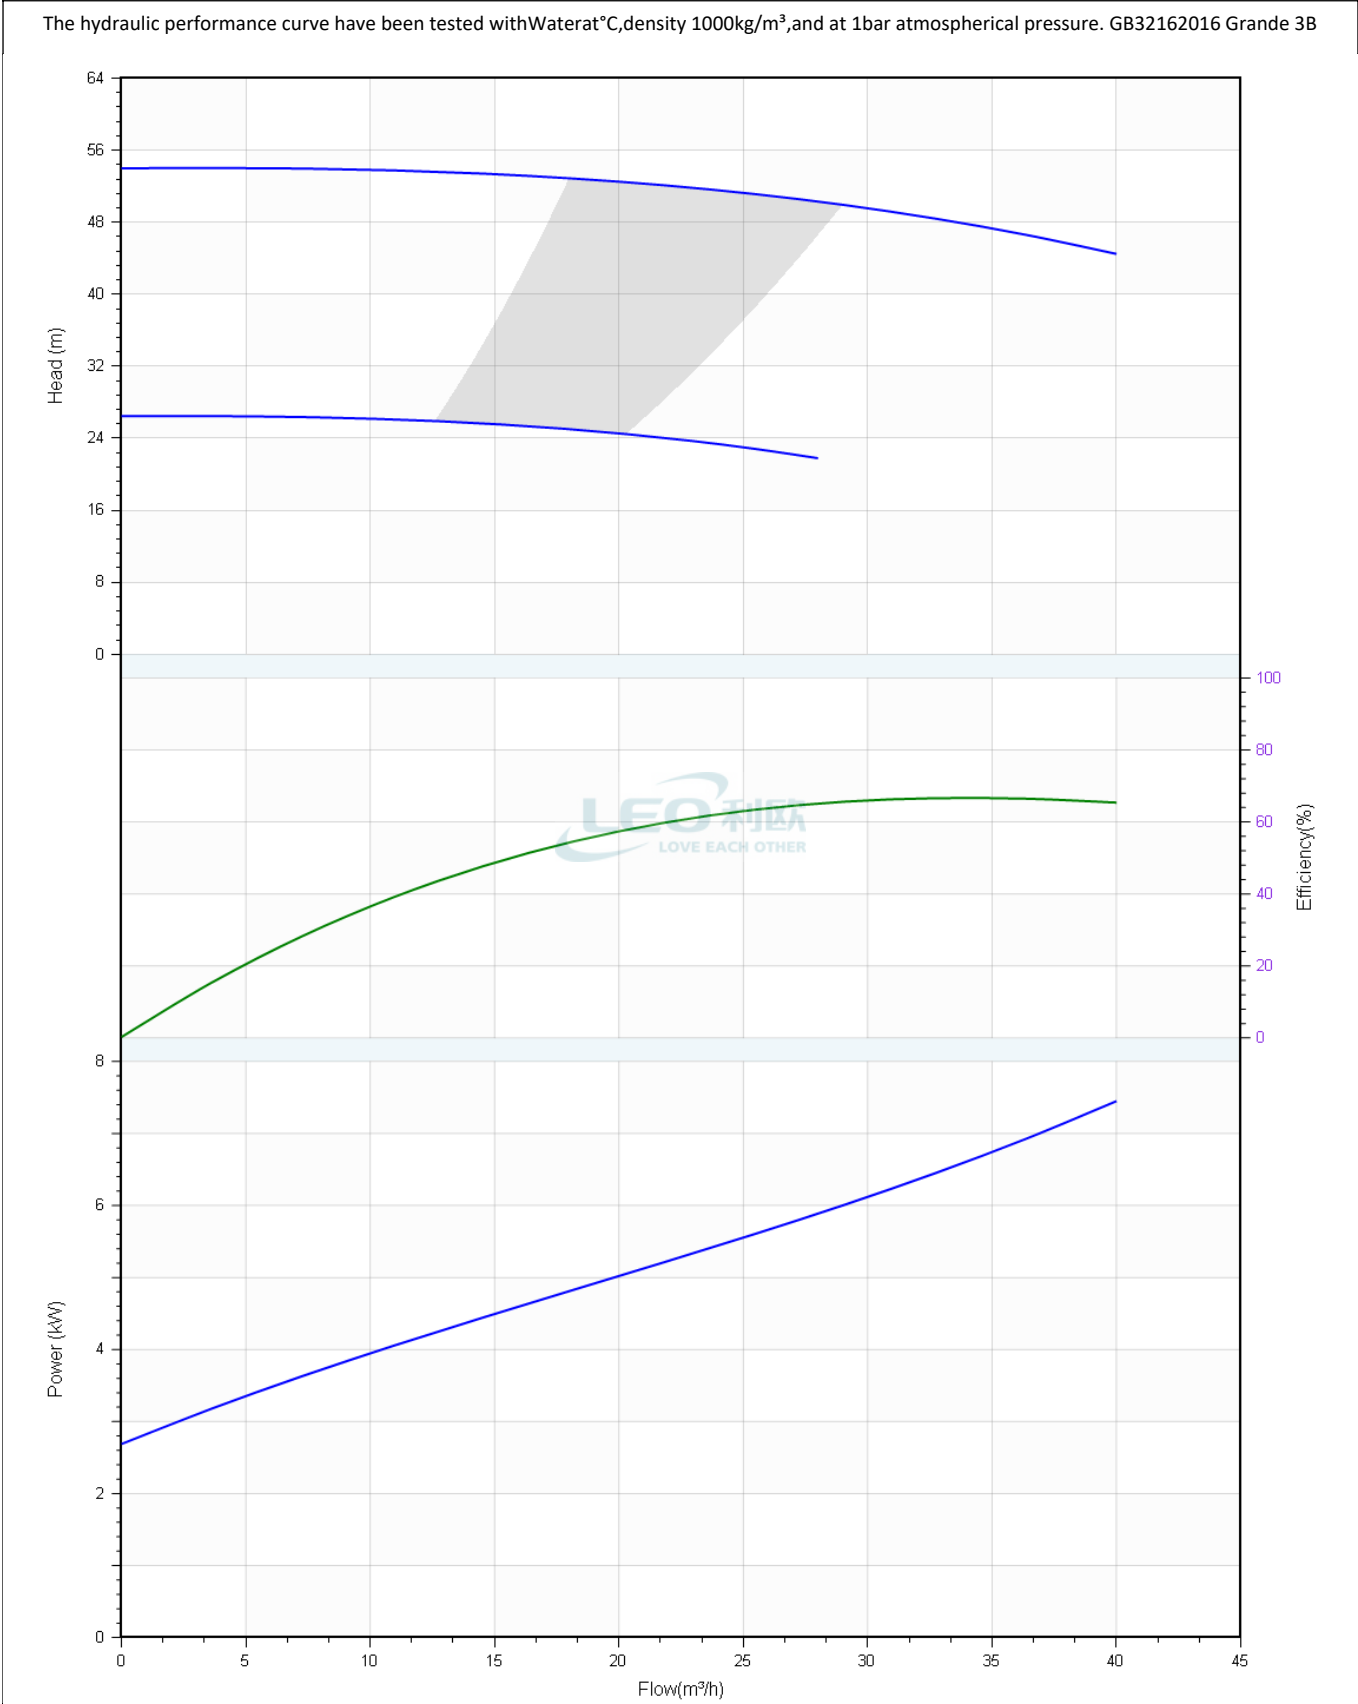


	Pump Technical Parameters LPP65-51-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/12/20
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95Б
Item NO		Contacts	
		Contact	

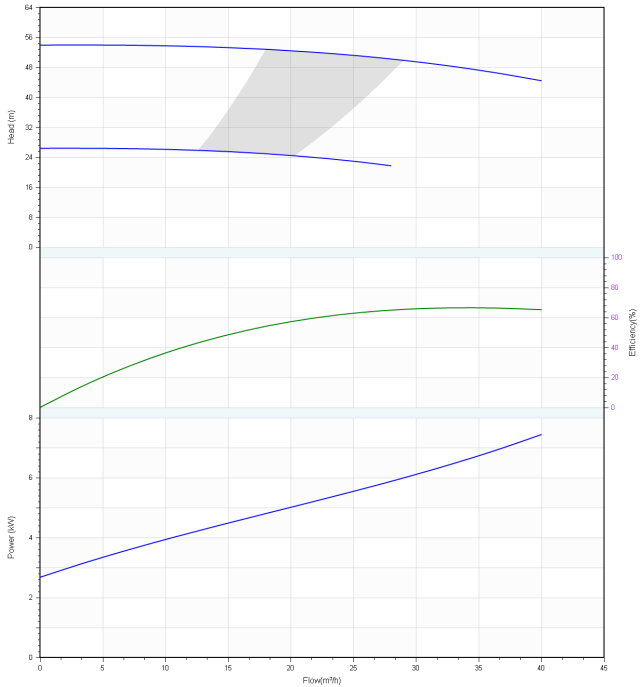
Rated parameters		
Pump model	LPP65-51-7.5/2	
Part NO.	LPP65-51-7.5/2	
Rated flow	25 m³/h	
Rated head	51 m	
Rated efficiency (%)	63	
Power (kW)	5.52	
Speed (rpm)	2950	
Max impeller diameter (mm)	192	
Medium		
Pumped medium	Water	
Working temperature (°C)	20	
Medium density (kg/m³)	1000	
Viscosity (mm²/s)	1	



	Installation picture LPP65-51-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/12/20
Project Name		Client Name	Spaceport
Item NO		Client Addr.	Куйбышева 95Б
		Contacts	
		Contact	

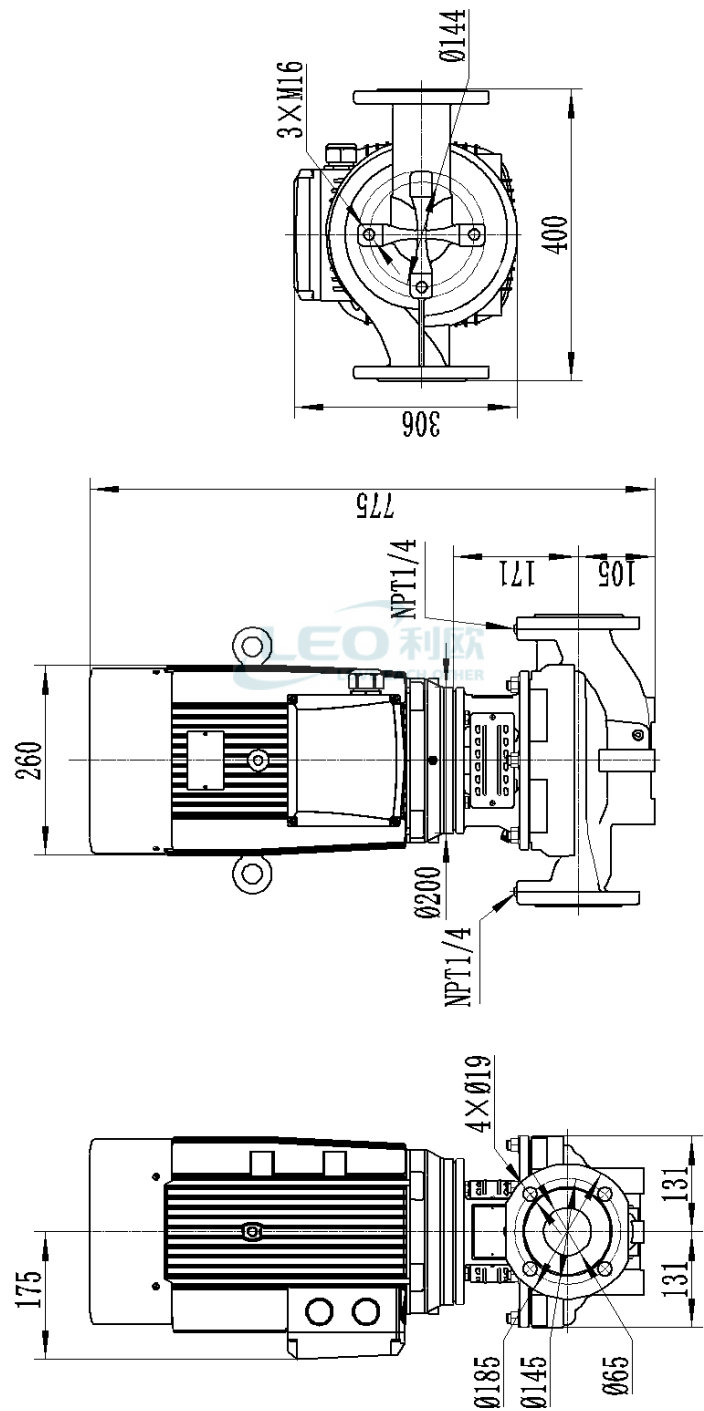

	Structure picture LPP65-51-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/12/20
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95Б
Item NO		Contacts	
		Contact	

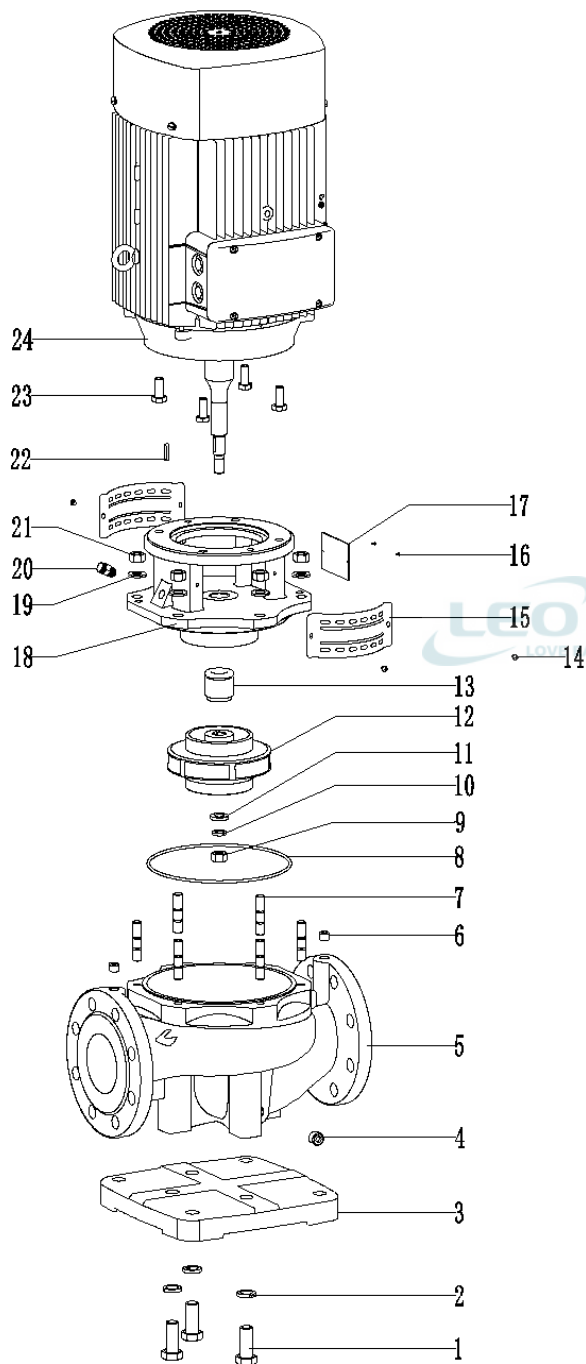

24	Motor	
23	Hex head bolt	
22	Key	304
21	Hex nut	
20	Release valve	HPb59-1
19	Washer	
18	Motor frame	HT200
17	Rivet	
16	Nameplate	
15	Guard plate	304
14	Screw	
13	Mechanical seal	SiC/C
12	Impeller	HT200
11	Washer	304
10	Spring washer	304
9	Hex nut	304
8	O-ring	NBR
7	Double-head stud A type	
6	Hexagonal socket head plug	
5	Pump body	HT200
4	Hexagonal socket head plug	
3	Baseplate	HT200
2	Spring washer	
1	Hex head bolt	
No.	Part	Material

	Physical picture LPP65-51-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/12/20
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95Б
Item NO		Contacts	
		Contact	

