

WILO Pumpen Österreich GmbH
Wilo Straße 1
A 2351 Wiener Neudorf, Austria
Phone
Fax

NOZ 25/20 DM
System: Standard pump



Customer

Project

Customer no.

Project no.

Contact

Position no.


Care of

Location

Date

2024-10-21

Page 1 / 1

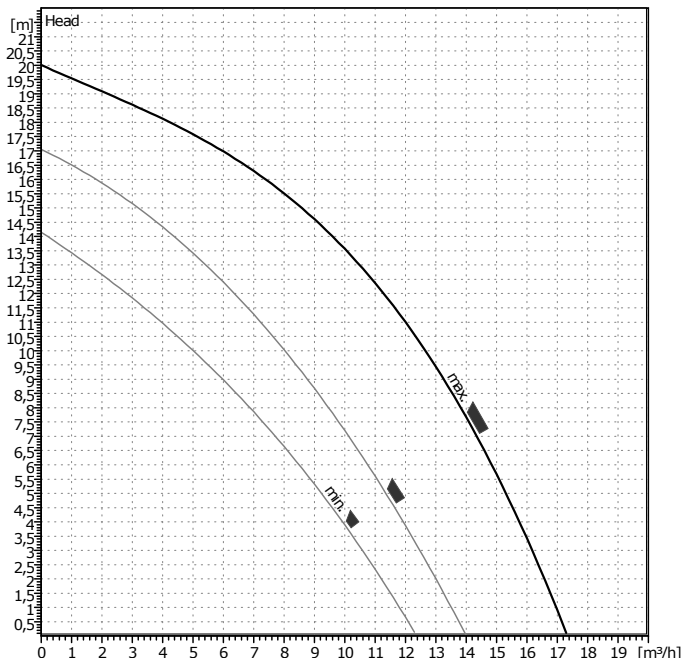

Requested data

Flow	0	m ³ /h
Head	0	m
Fluid	Water, pure	
Fluid temperature	20	°C
Density	0,9983	kg/dm ³
Kinematic viscosity	1,005	mm ² /s
Vapor pressure	0,02337	bar

Pump data

Type	NOZ 25/20 DM	
Pumpe type	Single head pump	
Operating type	1	
Pressure rating	PN10	
Min. fluid temperature	2	°C
Max. fluid temperature	110	°C

Hydraulic data (duty point)

Flow	m ³ /h
Head	m

Minimum suction head

Temperature						°C
Minimum suction head						m

Materials / Shaft seal

Housing	Cast iron
Shaft	Stainless steel
Impeller	Resin
Bearing	Silicon Carbide

Dimensions per pump

H1	54	B1	80				
H2	232	B2	154				
H3	286	B3	80				
L1	230	M	8				
L2	115						

Suction side	1 ½"	/ PN10
Discharge side	1 ½"	/ PN10
Weight	13,4	kg

Motordata per Motor/Pump/

Energy efficiency class	-	
Rated power P2	0,4	kW
Power input P1	1	kW
Nominal speed	2900	1/min
Rated voltage	3~400 V,50 Hz	
Max. current	1,6	A
Degree of protection	IP 44	
Permitted voltage tolerance +/-	10%	

Item no. of standard version 2479393

