



ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

50 Гц n = 2900 об/мин

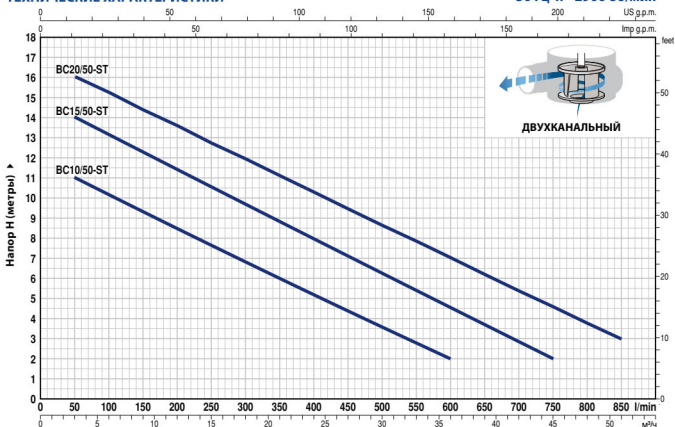

ТИП		Мощность (P2)		Q													
Однофазный	Трехфазный	кВт	ЛС		м³/ч	0	3	6	12	18	24	30	36	42	45	51	
BCm 10/50-ST	BC 10/50-ST	0.75	1	H метры	л/мин	0	50	100	200	300	400	500	600	700	750	850	
BCm 15/50-ST	BC 15/50-ST	1.1	1.5			12	11	10	8.5	7	5	3.6	2				
BCm 20/50-ST	BC 20/50-ST	1.5	2			15	14	13	11.5	9.7	8	6.3	4.6	2.9	2		
						17	16	15.3	13.5	12	10.3	8.6	7.0	5.3	4.5	3	

РАЗМЕРЫ И ВЕС

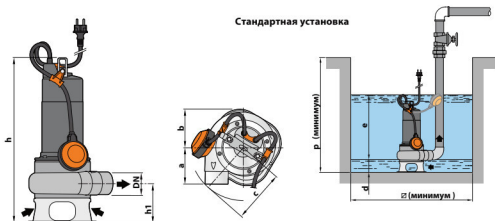

ТИП		ПАТРУБКИ	Прохождения	РАЗМЕРЫ мм										кг	
Однофазный	Трехфазный	DN	тв	a	b	c	h	h1	d	e	p	□	1~	3~	
BCm 10/50-ST	BC 10/50-ST	2"	Ø 50 мм	102	95	145	450	107	60	variable	500	500	13.4	12.2	
BCm 15/50-ST	BC 15/50-ST						483						16.0	14.4	
BCm 20/50-ST	BC 20/50-ST						513						18.2	16.0	