



# Datasheet

# Xitanium LED drivers – linear HV non-isolated

# Xitanium 75W 0.12A-0.4A 220V 1-10V 230V

9290 009 53706

#### **Enabling future-proof LED technology**

Xitanium LED drivers are designed to operate LED solutions for general lighting applications such as linear lighting, as well as down lighting and spot/accent lighting.

Reliability is enhanced by specific features that protect the connected LED module, e.g. hot wiring, reduced ripple current and thermal de-rating. Most drivers feature central DC operation.

In the coming years LEDs will continue to increase in efficiency, creating generation and complexity challenges for OEMs. With Xitanium LED drivers, flexibility in luminaire design is assured thanks to an adjustable output current. Application-oriented operating windows offer the flexibility required to provide the stable lumen output and light quality levels that lighting specifiers and architects demand.

#### Benefits

- High reliability underpinned by 5 year warranty
- Future-proof flexibility application-oriented operating windows enable LED generation and complexity management
- Compatibility adjustable output current enables operation of various LED solutions from different manufacturers or OEM own designs
- Flicker and noise free dimming with all Touch and DALI LED drivers due to amplitude dimming (AM)

#### Feature

- Up to 95% efficiency, lowest cost and smallest dimensions
- Operating windows output current can be adjusted via the Philips MultiOne configurator (TD drivers) or with a resistor outside the driver
- Reduced output ripple current and thermal de-rating for increased reliability
- Multiple versions DALI dimmable & programmable,
  1-10V dimmable, and fixed-output;
- All T5 form factors but various lengths
- For the iXt versions. longer life time (100khrs), improved surge and burst (4kV) and Tambient (-40°C to +60°C) specifications

#### **Application**

- 17W, 35W, 36W, 60W and 75W LED drivers for office applications
- 100W, 150W and 300W LED drivers for industry, warehouses, public areas, distribution centers and shopping malls

### **Electrical input data**

	T.	1	1
Specification item	Value	Unit	Condition
Rated input voltage range	220240	V <sub>ac</sub>	Performance range
Rated input voltage	230	V <sub>ac</sub>	
Rated input frequency range	5060	Hz	Performance range
Rated input current	0.38	A	@ max output power @ rated input voltage
Rated input power	83	W	@ rated output power @ rated input voltage
Power factor	0.9		@ rated output power @ rated input voltage
Total harmonic distortion	20	%	@ rated output power @ rated input voltage
Efficiency	91.9	%	@ rated output power @ rated input voltage @ max. Uout
Rated input voltage DC range	186250	V <sub>dc</sub>	Performance range
Input voltage AC range	198264	V <sub>ac</sub>	Operational range
Input frequency AC range	4566	Hz	Operational range
Input voltage DC range	168275	V <sub>dc</sub>	Operational range
Isolation input to output	No		

# **Electrical output data**


		1	I
Specification item	Value	Unit	Condition
Regulation method	Constant Current		
Output voltage	100220	V <sub>dc</sub>	
Output voltage max.	250	V	Maximum output voltage (rms)
Output current	0.120.4	A	
Output current tolerance ±	5	%	
Output current ripple LF	≤ 4	%	Ripple = peak / average, < 3kHz
Output P <sub>st</sub> <sup>LM</sup>	≤ 0.12		
Output SVM	≤ 0.07		
Output power	2175	W	

# Electrical data controls input

Specification item	Value	Unit	Condition
Control method	1-10V		See design-in guide at www.philips.com/oem for more
			controllability details.
Dimming range	10100	%	Default range
Isolation controls input to output	Basic		acc. IEC61347-1

### **Wiring and Connections**

		ı	
Specification item	Value	Unit	Туре
Input wire cross-section	0.51.5 / 2016	mm <sup>2</sup> / AWG	WAG0744, solid wire
Input wire strip length	89	mm	
Output wire cross-section	0.51.5 / 2016	mm <sup>2</sup> / AWG	WAGO744, solid wire
Output wire strip length	89	mm	
Control wire cross-section	0.51.5 / 2016	mm <sup>2</sup> / AWG	WAGO744, solid wire
Control wire strip length	89	mm	
Maximum cable length	4	m	Total length of wiring including LED module, one way




### Insulation

Insulation per IEC61347-1	Input	Output+LEDset	1-10V	Housing
Input		No	Basic	Basic
Output+LEDset	No		Basic	Basic
1-10V	Basic	Basic		Basic
Housing	Basic	Basic	Basic	

# Dimensions and weight

Specification item	Value	Unit	Tolerance (mm)
Length (A1)	280	mm	
Mounting hole distance (A2)	270	mm	
Width (B1)	30	mm	
Height (C1)	21	mm	
Mounting hole diameter (D1)	4.1	mm	
Weight	200	gram	

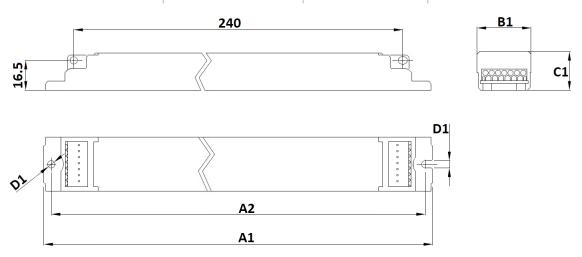

# Logistical data


Specification item	Value
Product name	Xitanium 75W 0.12A-0.4A 220V 1-10V 230V
EOC	871869646968200
Logistic code 12NC	9290 009 53706
EAN1 (GTIN)	8718696469682
EAN3 (box)	8718696469699
Pieces per box	24

# Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-20+50	°C	Higher ambient temperature allowed as long as Tcase-max is not exceeded
Tcase-max	75	°C	Maximum temperature measured at T <sub>case</sub> -point
Tcase-life	75	°C	Measured at T <sub>case</sub> -point
Maximum housing temperature	110	°C	In case of a failure, inherent by design
Relative humidity	1090	%	Non-condensing

#### Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	50,000	hours	Measured temperature at Tcase-point is Tcase-life. Maximum
			failures = 10%
Mains switching cycles	> 100,000	switches	See Design-in guide for detailed explanation

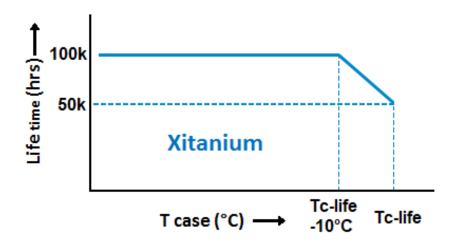

# Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25+85	°C	
Relative humidity	595	%	Non-condensing

# Programmable features


	I.	1	
Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	LEDset	120 mA	
LED Module Temperature Protection (MTP)	No		
Constant Light Output (CLO)	No		
Corridor Mode	No		
DC emergency (DCemDim)	No		

### **Features**

Specification item	Value	Condition
Open load protection	Yes	Automatic recovering
Short circuit protection	Yes	Automatic recovering
Over power protection	Yes	Automatic recovering
Hot wiring	No	
Suitable for fixtures with protection class	I	per IEC60598
Energy metering (DALI part 252)	No	
Diagnostics	No	

#### Inrush current

Specification item	Value	Unit	Condition
Inrush current	17	A	Input voltage 230V
Inrush peak width	296	μs	Input voltage 230 V, measured at 50% height
Drivers / MCB 16A type B	≤ 24	pcs	Indicative value



Please refer to the driver design in guide if you use other MCB-types.

# Driver touch current / protective conductor current

Specification item	Value	Unit	Condition
Typical Touch Current (ins. Class II)	0.3	mA peak	Acc. IEC61347-1. LED module contribution not included

### **Surge immunity**


Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	1	kV	Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Mains surge immunity (comm. mode)	2	kV	Acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us
Control surge immunity (diff. mode)	1	kV	Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Control surge immunity (comm. mode)	2	kV	Acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us

# **Application Info**


Specification item	Value
Approval marks	BIS / CCC / CE / EAC / EL / ENEC / TISI / UA
Ingress Protection classification (IP)	20
Application	Indoor Linear
Mounting Type	Built-in

### Graphs

# Operating window



### Power factor versus output power



### **Efficiency versus output power**

