


CIRCUIT BREAKER 230V 6KA, 1+N-POLE/1MW,
C 6A

General technical data:		
Current / for AC / rated value	A	6
Tripping characteristic class		C
type of voltage		AC/DC
Supply voltage		
• for AC / rated value	V	230
• with single-phase operation / with AC / rated value	V	230
• with multi-phase operation / with AC / rated value	V	400
Operating voltage		
• minimum	V	24
• with single-phase operation / with AC / maximum	V	250
• with multi-phase operation / with AC / maximum	V	440
Number of poles /note		1P+N right
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	6
• acc. to EN 60898 / rated value	kA	6
Mounting depth	mm	70
Number of pitch units for width		1
Product feature / sealable		Yes
mounting position		any

Protection class IP		IP20, with connected conductors
Degree of pollution		2
Ambient temperature		
• minimum	°C	-25
• maximum	°C	45
Influence of the surrounding temperature		Periodically +55°C, max. 95% humidity
Ambient temperature / during storage		
• minimum	°C	-40
• maximum	°C	75
Mechanical operating cycles as operating time / typical		20,000
Overshoot class		3
Product equipment / touch-protection		Yes
Insulation voltage / for AC / rated value	V	250
Section de conducteur raccordable		
• solid		
• minimum	mm ²	0.75
• maximum	mm ²	16
• multibrin		
• minimum	mm ²	0.75
• maximum	mm ²	16
• finely stranded / with wire end processing		
• minimum	mm ²	0.75
• maximum	mm ²	10
Tightening torque / with screw-type terminals		
• minimum	N·m	2
• maximum	N·m	2.5
Product feature		
• [not supplied - silicon-free]		Yes
• halogen-free		Yes
Number of test cycles / for environmental testing / in accordance with IEC 60068-2-30		6

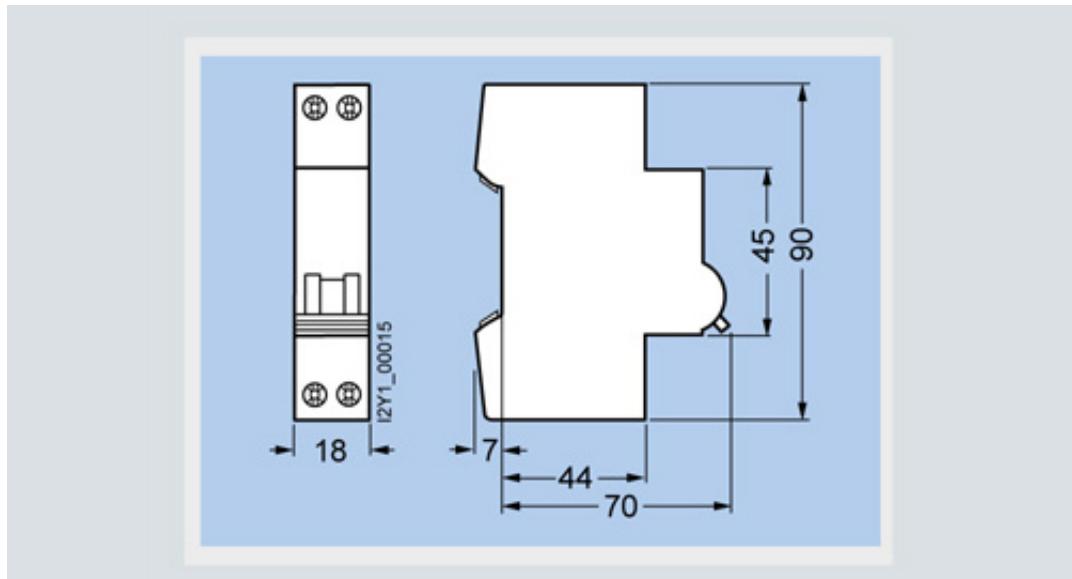

last change:

Jul 4, 2012