



CONTACTOR, AC-3 7.5 KW/400 V, DC 24 V,  
3-POLE, 2 NO + 2 NC, SIZE S0,  
SCREW CONNECTION

### General technical data:

<b>product brand name</b>		SIRIUS
<b>Size of the contactor</b>		S0
<b>Protection class IP / on the front</b>		IP20
<b>Degree of pollution</b>		3
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Ambient temperature / during operating</b>	°C	-25 ... +60
<b>Mechanical operating cycles as operating time</b>		
• of the contactor / typical		10,000,000
• of the contactor with added auxiliary switch block / typical		10,000,000
• of the contactor with added electronics-compatible auxiliary switch block / typical		5,000,000

## Main circuit:

<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		3
<b>Operating current</b>		
• at AC-1 / at 400 V		
• at 40 °C ambient temperature / rated value	A	40
• at AC-3 / at 400 V / rated value	A	17
• at AC-4 / at 400 V / rated value	A	15.5

• with 1 current path / at DC-1			
• at 24 V / rated value	A	35	
• at 110 V / rated value	A	4.5	
• with 2 current paths in series / at DC-1			
• at 24 V / rated value	A	35	
• at 110 V / rated value	A	35	
• with 3 current paths in series / at DC-1			
• at 24 V / rated value	A	35	
• at 110 V / rated value	A	35	
• with 1 current path / at DC-3 / at DC-5			
• at 24 V / rated value	A	20	
• at 110 V / rated value	A	2.5	
• with 2 current paths in series / at DC-3 / at DC-5			
• at 24 V / rated value	A	35	
• at 110 V / rated value	A	15	
• with 3 current paths in series / at DC-3 / at DC-5			
• at 24 V / rated value	A	35	
• at 110 V / rated value	A	35	

<b>Service power</b>			
• at AC-2 / at 400 V / rated value	kW	7.5	
• at AC-3 / at 400 V / rated value	kW	7.5	
• at AC-4 / at 400 V / rated value	W	7,500	

<b>Control circuit:</b>		
<b>Voltage type / of control feed voltage</b>		DC
<b>Operating range factor control supply voltage rated value / of the magnet coil</b>		
• for DC		0.8 ... 1.1
<b>Pull-in power / of the solenoid / for DC</b>	W	5.4
<b>Holding power / of the solenoid / for DC</b>	W	5.4

<b>Auxiliary circuit:</b>		
<b>Contact reliability / of the auxiliary contacts</b>		1 faulty switching per 100 million (17 V, 1 mA)
<b>Number of NC contacts / for auxiliary contacts / instantaneous switching</b>		2
<b>Number of NO contacts / for auxiliary contacts / instantaneous switching</b>		2

<b>Short-circuit:</b>		
<b>Design of the fuse link</b>		fuse gL/gG: 10 A

- with type of assignment 1 / required
- at type of coordination 2 / required

fuse gL/gG: 63 A

fuse gL/gG: 25 A


#### Installation/mounting/dimensions:


<b>Mounting type</b>	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022	
<b>series installation</b>	Yes	
<b>Width</b>	mm	45
<b>Height</b>	mm	85
<b>Depth</b>	mm	150
<b>Distance, to be maintained, to earthed part / sidewards</b>	mm	6

#### Connection type:

<b>Design of the electrical connection</b>		
• for main current circuit		screw-type terminals
• for auxiliary and control current circuit		screw-type terminals
<b>Type of the connectable conductor cross-section</b>		
• for main contacts		2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), max. 2x 10 mm <sup>2</sup>
• solid		
• finely stranded		
• with conductor end processing		2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )
• for AWG conductors / for main contacts		2x (20 ... 16), 2x (18 ... 14), 1x 12
• for auxiliary contacts		
• solid		2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), max. 2x (0.75 ... 4 mm <sup>2</sup> )
• finely stranded		
• with conductor end processing		2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
• for AWG conductors / for auxiliary contacts		2x (20 ... 16), 2x (18 ... 14), 1x 12

#### Certificates/approvals:

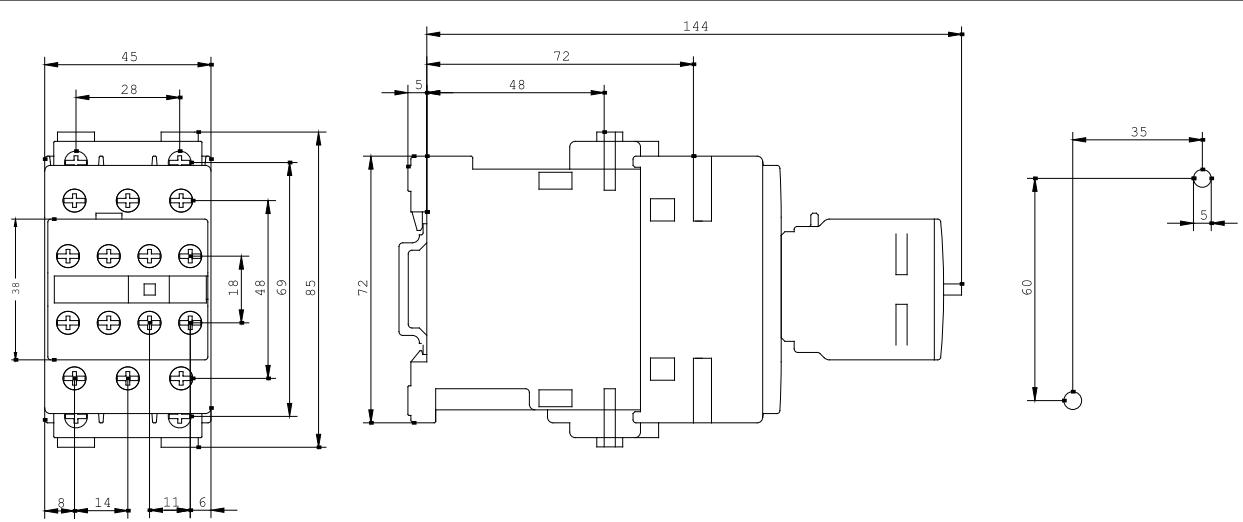

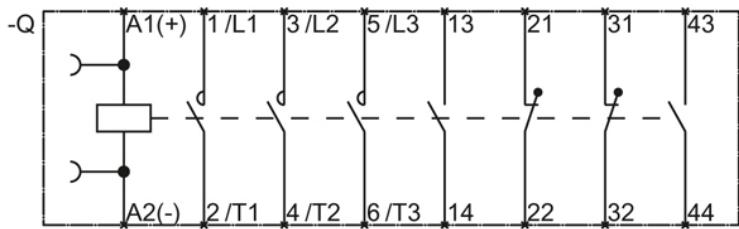

last change:

Jun 18, 2014