



Circuit breaker size S00 for motor protection, CLASS 10 A-release 5.5...8 A N-release 104 A Screw terminal Standard switching capacity

| | |
|---|----------------------|
| product brand name | SIRIUS |
| product designation | Circuit breaker |
| design of the product | For motor protection |
| product type designation | 3RV1 |
| General technical data | |
| size of the circuit-breaker | S00 |
| size of contactor can be combined company-specific | S00 |
| product extension auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 9.25 W |
| • at AC in hot operating state per pole | 3.1 W |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| mechanical service life (operating cycles) | |
| • of the main contacts typical | 100 000 |
| • of auxiliary contacts typical | 100 000 |
| electrical endurance (operating cycles) typical | 100 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 01/01/2013 |
| Net Weight | 278 g |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -20 ... +60 °C |
| • during storage | -50 ... +80 °C |
| • during transport | -50 ... +80 °C |
| relative humidity during operation | 10 ... 95 % |
| Main circuit | |
| number of poles for main current circuit | 3 |
| adjustable current response value current of the current-dependent overload release | 5.5 ... 8 A |
| type of voltage for main current circuit | AC |
| operating voltage | |
| • rated value | 20 ... 690 V |
| • at AC-3 rated value maximum | 690 V |
| • at AC-3e rated value maximum | 690 V |
| operating frequency rated value | 50 ... 60 Hz |
| operational current rated value | 8 A |
| operational current | |

| | |
|--|------------|
| • at AC-3 at 400 V rated value • at AC-3e at 400 V rated value | 8 A 8 A |
| operating power | |
| • at AC-3 | |
| — at 230 V rated value | 1.5 kW |
| — at 400 V rated value | 3 kW |
| — at 500 V rated value | 4 kW |
| — at 690 V rated value | 5.5 kW |
| • at AC-3e | |
| — at 230 V rated value | 1.5 kW |
| — at 400 V rated value | 3 kW |
| — at 500 V rated value | 4 kW |
| — at 690 V rated value | 5.5 kW |
| operating frequency | |
| • at AC-3 maximum | 15 1/h |
| • at AC-3e maximum | 15 1/h |
| Auxiliary circuit | |
| type of voltage for auxiliary and control circuit | AC/DC |
| number of NC contacts for auxiliary contacts | 0 |
| number of NO contacts for auxiliary contacts | 0 |
| number of CO contacts for auxiliary contacts | 0 |
| Protective and monitoring functions | |
| product function | |
| • ground fault detection | No |
| • phase failure detection | Yes |
| trip class | CLASS 10 |
| design of the overload release | thermal |
| maximum short-circuit current breaking capacity (Icu) | |
| • at AC at 240 V rated value | 100 kA |
| • at AC at 400 V rated value | 50 kA |
| • at AC at 500 V rated value | 3 kA |
| • at AC at 690 V rated value | 2 kA |
| operating short-circuit current breaking capacity (Ics) at AC | |
| • at 240 V rated value | 100 kA |
| • at 400 V rated value | 12.5 kA |
| • at 500 V rated value | 3 kA |
| • at 690 V rated value | 2 kA |
| response value current of instantaneous short-circuit trip unit | 104 A |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| • at 480 V rated value | 8 A |
| • at 600 V rated value | 8 A |
| yielded mechanical performance [hp] | |
| • for single-phase AC motor | |
| — at 110/120 V rated value | 0.33 hp |
| — at 230 V rated value | 1 hp |
| • for 3-phase AC motor | |
| — at 200/208 V rated value | 2 hp |
| — at 220/230 V rated value | 2 hp |
| — at 460/480 V rated value | 5 hp |
| — at 575/600 V rated value | 5 hp |
| Short-circuit protection | |
| product function short circuit protection | Yes |
| design of the short-circuit trip | magnetic |
| design of the fuse link for IT network for short-circuit protection of the main circuit | |
| • at 240 V | gG 80 A |
| • at 400 V | gG 63 A |
| • at 500 V | gG 40 A |

• at 690 V

gG 40 A


Installation/ mounting/ dimensions


| | |
|-------------------------------|--|
| mounting position | any |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| height | 90 mm |
| width | 45 mm |
| depth | 75 mm |
| required spacing | |
| • for grounded parts at 400 V | |
| — downwards | 20 mm |
| — upwards | 20 mm |
| — at the side | 9 mm |
| • for live parts at 400 V | |
| — downwards | 20 mm |
| — upwards | 20 mm |
| — at the side | 9 mm |
| • for grounded parts at 500 V | |
| — downwards | 20 mm |
| — upwards | 20 mm |
| — at the side | 9 mm |
| • for live parts at 500 V | |
| — downwards | 20 mm |
| — upwards | 20 mm |
| — at the side | 9 mm |
| • for grounded parts at 690 V | |
| — downwards | 20 mm |
| — upwards | 20 mm |
| — backwards | 0 mm |
| — at the side | 9 mm |
| — forwards | 0 mm |
| • for live parts at 690 V | |
| — downwards | 20 mm |
| — upwards | 20 mm |
| — backwards | 0 mm |
| — at the side | 9 mm |
| — forwards | 0 mm |

Connections/ Terminals

| | |
|--|--|
| type of electrical connection | |
| • for main current circuit | screw-type terminals |
| arrangement of electrical connectors for main current circuit | Top and bottom |
| type of connectable conductor cross-sections | |
| • for main contacts | |
| — solid or stranded | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²), 2x (1 ... 4 mm ²) |
| — finely stranded with core end processing | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) |
| type of connectable conductor cross-sections | |
| • for auxiliary contacts | |
| — solid or stranded | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) |
| tightening torque | |
| • for main contacts with screw-type terminals | 0.8 ... 1.2 N·m |
| • for auxiliary contacts with screw-type terminals | 0.8 ... 1.2 N·m |
| design of screwdriver shaft | Diameter 5 to 6 mm |
| size of the screwdriver tip | Pozidriv size 2 |
| design of the thread of the connection screw | |
| • for main contacts | M3 |
| Safety related data | |
| product function suitable for safety function | Yes |
| suitability for use | |
| • safety-related switching on | No |

| | |
|--|--|
| • safety-related switching OFF | Yes |
| service life maximum | 10 a |
| test wear-related service life necessary | Yes |
| proportion of dangerous failures | |
| • with low demand rate according to SN 31920 | 40 % |
| • with high demand rate according to SN 31920 | 50 % |
| B10 value with high demand rate according to SN 31920 | 5 000 |
| failure rate [FIT] with low demand rate according to SN 31920 | 50 FIT |
| ISO 13849 | |
| device type according to ISO 13849-1 | 3 |
| overdimensioning according to ISO 13849-2 necessary | Yes |
| IEC 61508 | |
| safety device type according to IEC 61508-2 | Type A |
| Electrical Safety | |
| protection class IP on the front according to IEC 60529 | IP20 |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
| Display | |
| display version for switching status | Rocker switch |
| Approvals Certificates | |
| Environment | General Product Approval |

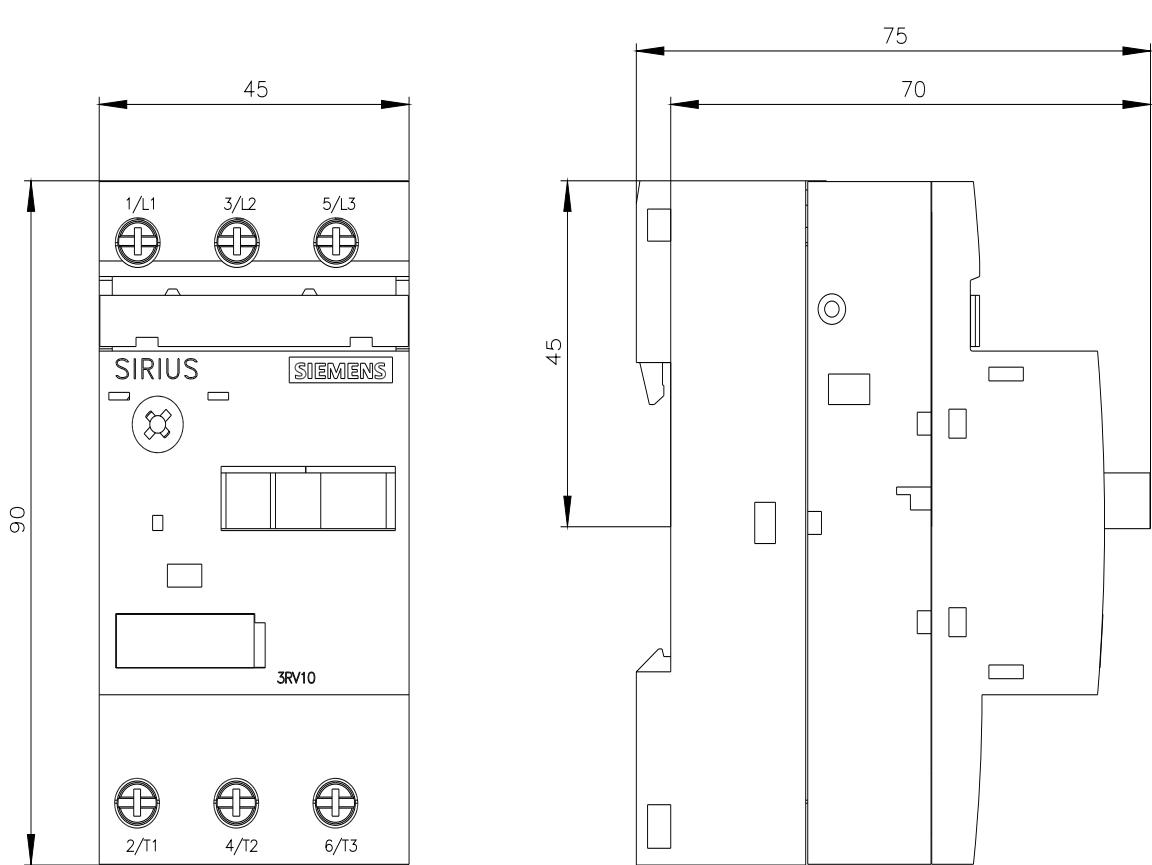

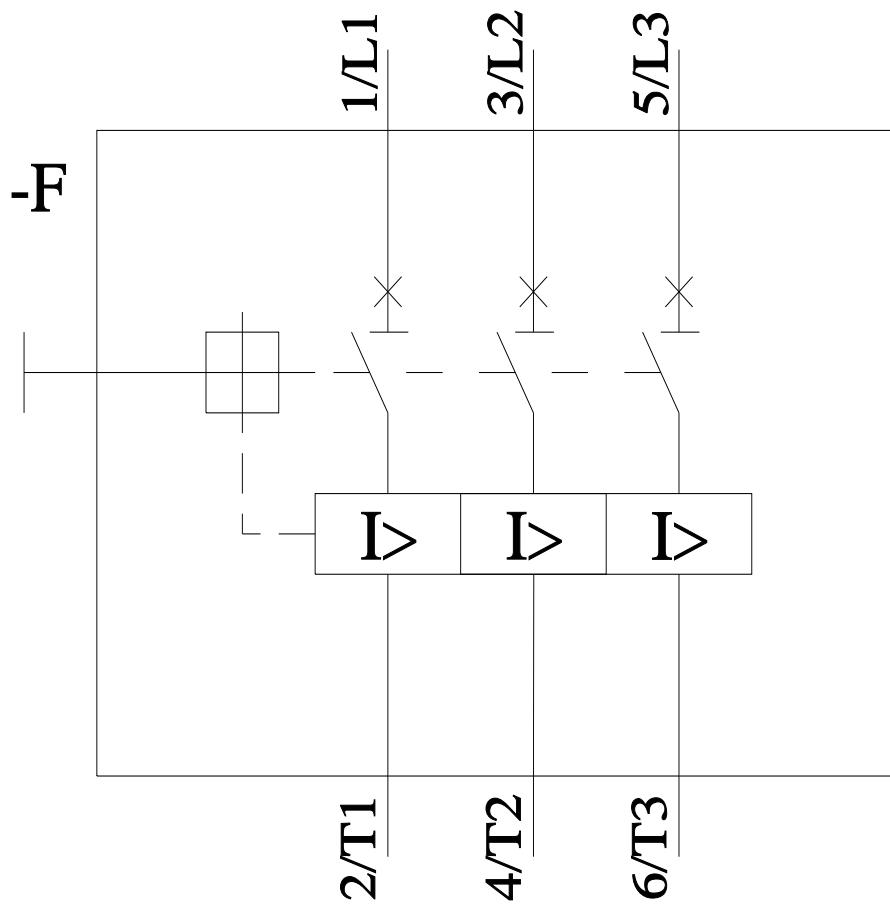

last modified:

11/11/2025