


	Product Information 100WQ65-15-5.5	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/11/09
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95 Б
Item NO		Contacts	
		Contact	

Part NO.	100WQ65-15-5.5T		
Product Picture		Note	
		Main Application 1) Drainage systems 2) Rain & storm water drainage 3) Waste water with fibres & particles content 4) Domestic & municipal & industrial waste water transfer. 5) To transfer various wastewater, dirty water	
Nameplate parameters flow 65 m³/h head 15 m speed 3000 rpm number of stages 1			
Technical Curve tolerance GB/T 3216 Appendix A Maximum lift (m) 27 Minimum usage flow (m³/ h) 10 Maximum use flow (m³/ h) 105			
Material Impeller HT200 Pump inlet HT200 Cylinder head HT200 chassis HT200 Upper bearing seat HT200 Top hat HT200			
Working conditions Max. Particles Size 30 Max. ambient temperature (°C) 40 Max. liquid temperature (°C) 40 Pumped medium The maximum liquid density is 1.2X10³Kg/m³ Working pressure PN6			
Installation Coupling Model DN100 Max. Immersion Depth 5 Connection standard Soft pipe/Flange Pipe Diameter 100			
Motor Motor phase Three phase Protection class IP×8 Motor poles 2 Insulation class F Motor power (KW) 5.5KW Frequency 50			

	Product Information 100WQ65-15-5.5	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/11/09
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95 Б
Item NO		Contacts	
		Contact	


Rated voltage (V)	380
Rated current (A)	9.28
Power factor	0.881
Drive end bearing	6307
Non-drive end bearing	6206
Efficiency (%)	87.5
Seal	
Mechanical seal	Double Mechanical Seal WQ-30
Weight/Packaging	
Gross weight (kg)	85.8
Package size	904*399*439
	

	Performance Curve 100WQ65-15-5.5	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/11/09
Project Name		Client Name	Spaceport
Item NO		Client Addr.	Куйбышева 95 Б
		Contacts	
		Contact	

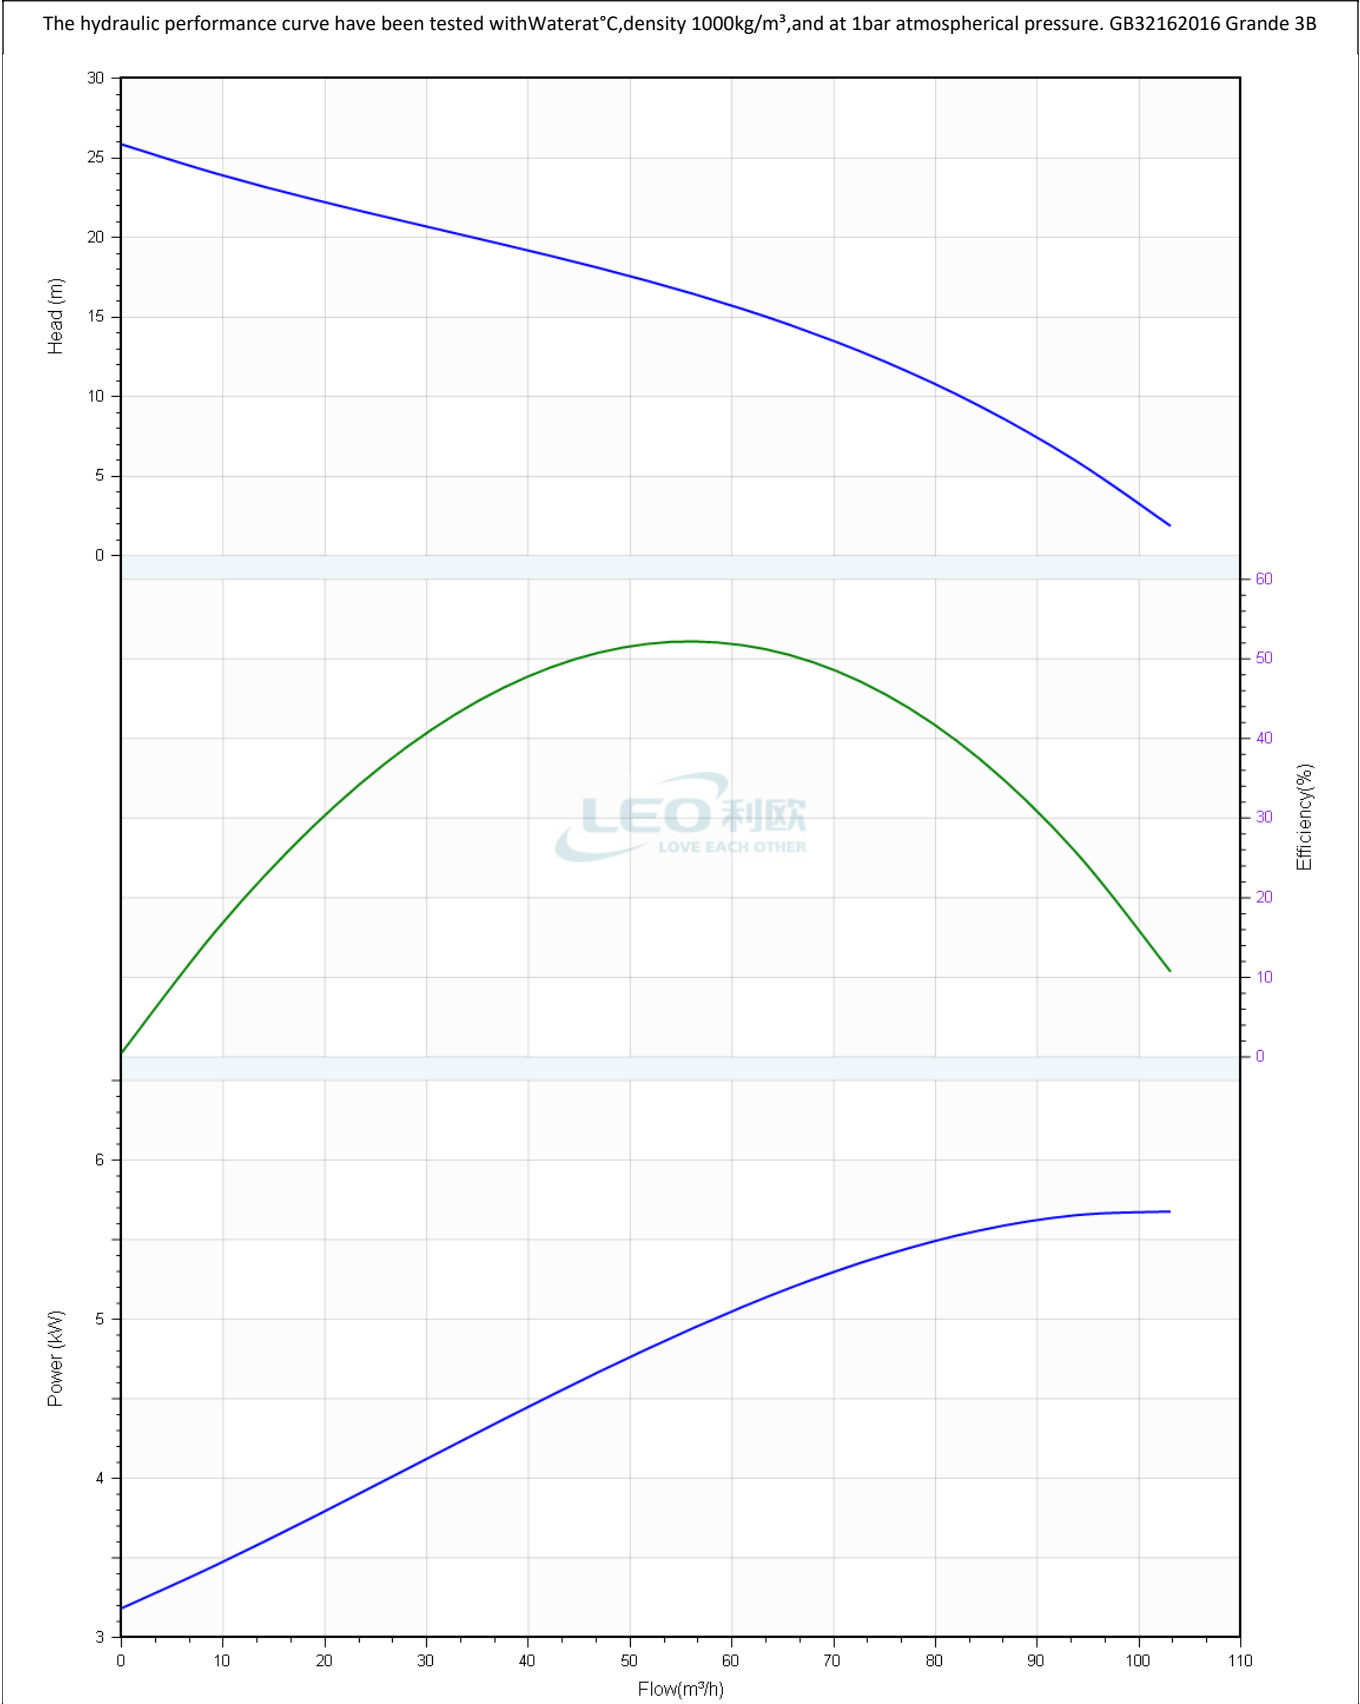


	Pump Technical Parameters 100WQ65-15-5.5	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/11/09
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95 Б
Item NO		Contacts	
		Contact	


Rated parameters	
Pump model	100WQ65-15-5.5
Part NO.	100WQ65-15-5.5T
Rated flow	65 m³/h
Rated head	15 m
Rated efficiency (%)	50.8
Power (kW)	5.23
Speed (rpm)	3000
Medium	
Pumped medium	Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

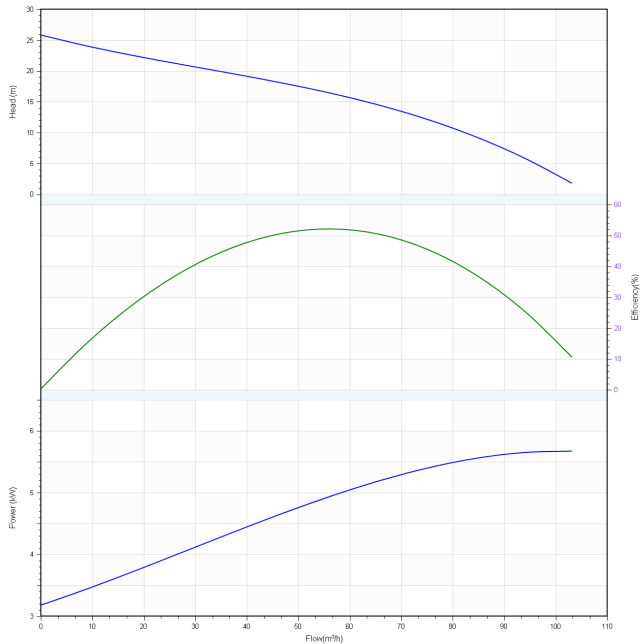

	Installation picture 100WQ65-15-5.5	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/11/09
Project Name		Client Name	Spaceport
Item NO		Client Addr.	Куйбышева 95 Б
		Contacts	
		Contact	

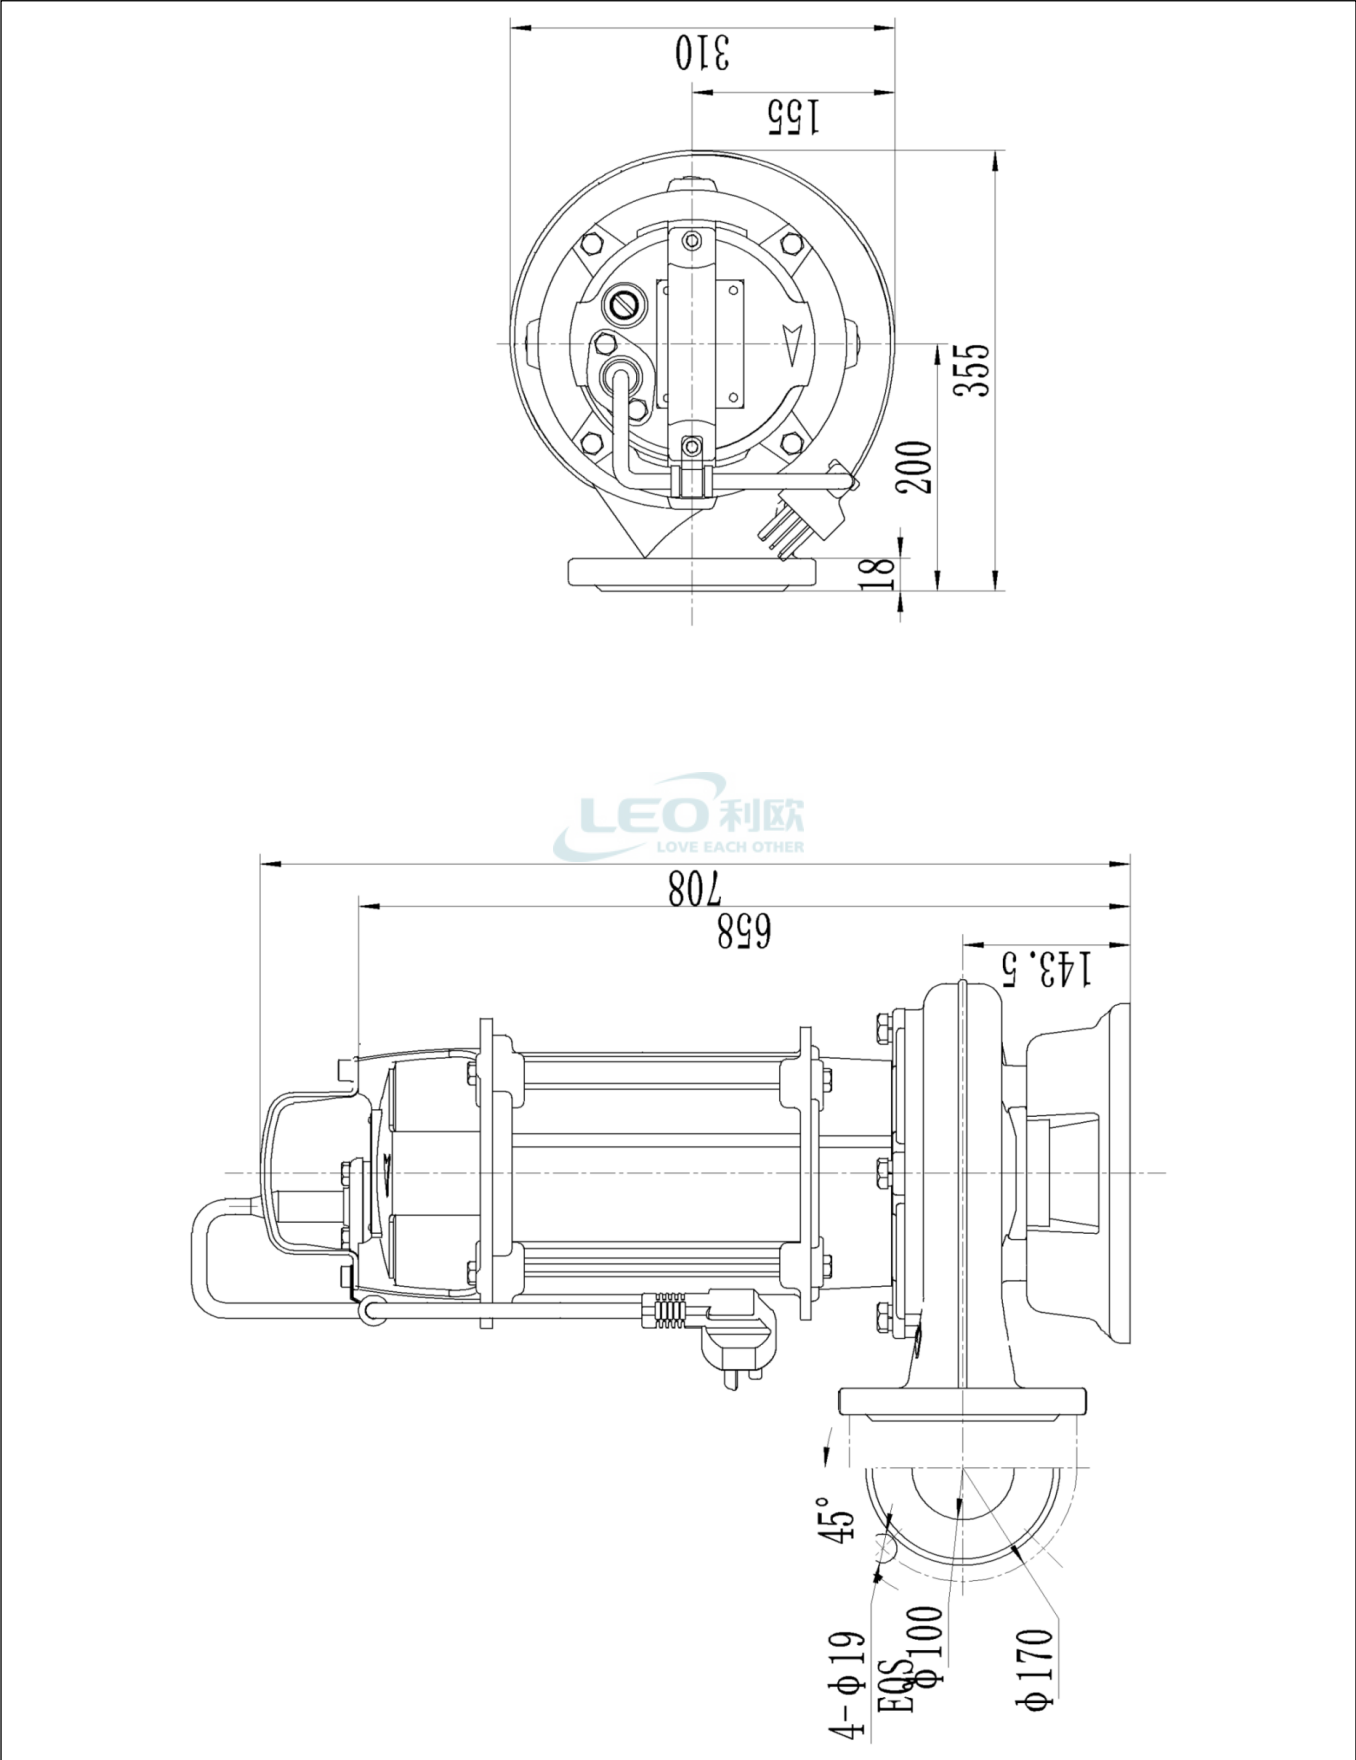

	Structure picture 100WQ65-15-5.5	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/11/09
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95 Б
Item NO		Contacts	
		Contact	

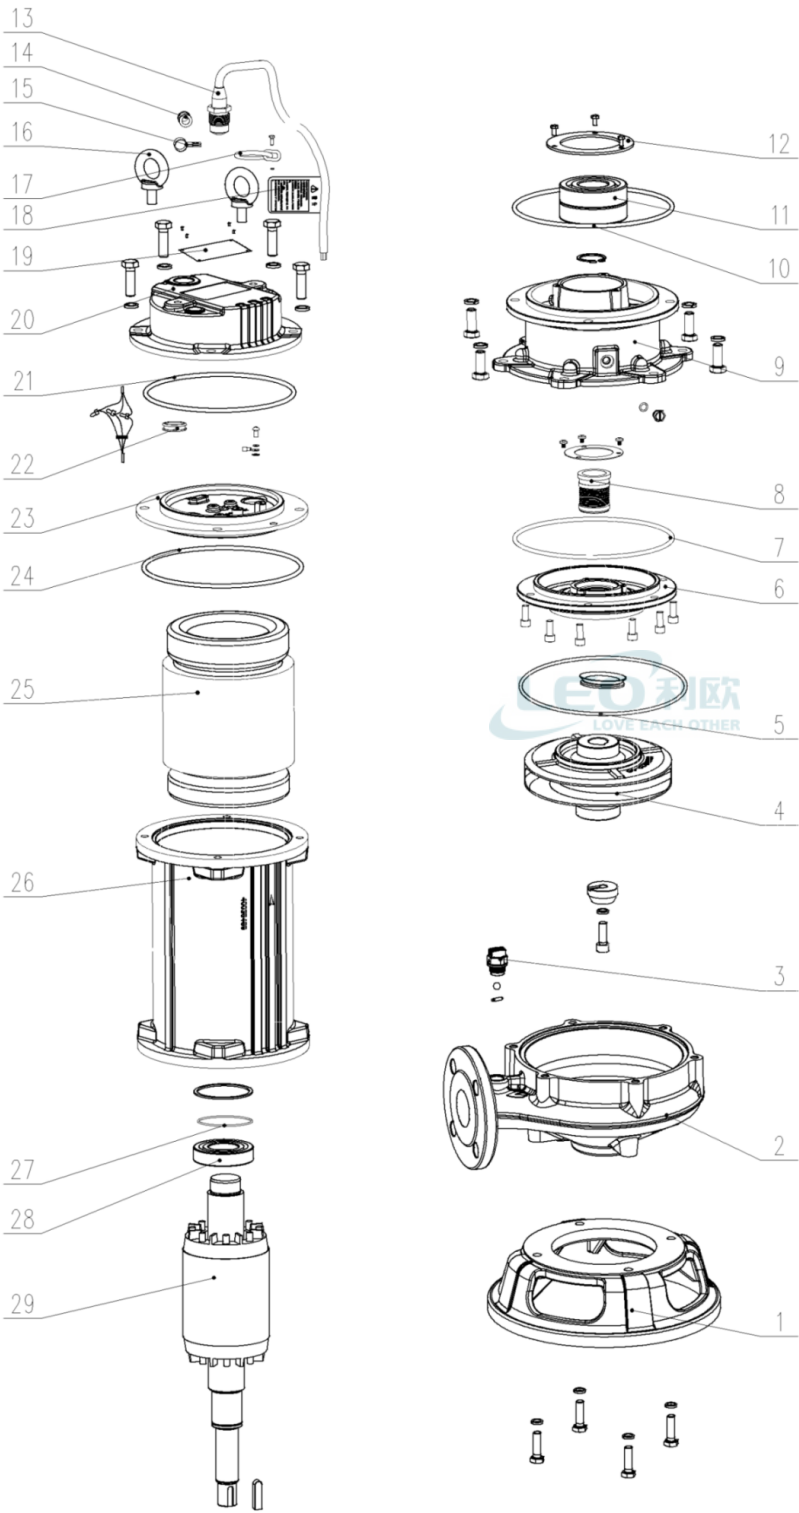

29	转子	
28	轴承	
27	O形密封圈	NBR
26	机筒	HT200
25	定子	
24	O形密封圈	NBR
23	上轴承盖	HT200
22	出线嘴	NBR
21	O形密封圈	NBR
20	顶盖	HT200
19	铭牌	304
18	警示标贴	聚亚胺不干胶
17	不锈钢圆环组件	304
16	吊环	304
15	线夹	不锈钢
14	线夹护套	NBR
13	电缆线组件	
12	轴承压板	Q235
11	轴承	
10	O形密封圈	NBR
9	油室	HT200
8	双端面机械密封	
7	O形密封圈	NBR
6	泵盖	HT200
5	O形密封圈	NBR
4	叶轮	HT200
3	放气阀体	PA66-GF30
2	泵体	HT200
1	底座	HT200
序号	名称	材料

	Physical picture 100WQ65-15-5.5	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/11/09
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95 Б
Item NO		Contacts	
		Contact	

